

509VGC2E-C-1B

5mm Round, Red & Yellow Green, Bi-Color LED
Three Leads with One Common Cathode Type

Technical Data Sheet

Features:

- Bulk, Available on tape and reel.
- Super Bright Red and Super Yellow Green chips are matched for uniform light output.
- Common Cathode.
- Long life solid state reliability.
- Low power consumption.
- I.C. compatible.
- Compliance with EU REACH.
- The product itself will remain within RoHS compliant Version.

Descriptions:

- The lamp is a three leads bicolor light sources designed for a variety of applications where dual state illumination is required in the same package. There are two LED chips, high efficiency red, and high performance green (Yellow Green) mounted on a central common cathode lead for maximum onaxis viewability. Colors between Red and Green can be generated by independently pulse width modulating the LED chips.

Applications:

- Computer.
- Communication.
- Consumer.
- Home appliance.
- Industrial.

Device Selection Guide

| Part No. | Emitting Color | | Lens Color |
|---------------|----------------|--------------------|-------------|
| 509VGC2E-C-1B | V | Super Bright Red | Water Clear |
| | G | Super Yellow Green | |

5mm Round, Red & Yellow Green, Bi-Color LED Three Leads with One Common Cathode Type

Technical drawing of the LED package showing top, side, and detail views with dimensions in mm.

Top View Dimensions:

- Overall width: $\varnothing 5.85 [0.230]$
- Overall height: $\varnothing 5 [0.197]$

Side View Dimensions:

- Package height: $8.65 [0.341]$
- Lead length (from base): $25 [0.984] \text{ MIN } \pm 1$
- Lead length (from mounting surface): $27 [1.063] \text{ MIN } \pm 1$
- Lead length (from top of package): $29 [1.142] \text{ MIN } \pm 1$
- Lead thickness: $0.5 [0.020]$
- Lead width: $2.54 [0.100]$

Detail View Dimensions:

- Lead thickness: $0.5 [0.020]$
- Lead width: $2.54 [0.100]$

Pinout and Polarity:

- 1 Green Anode
- 2 Common Cathode
- 3 Red Anode

POLARITY

1. All dimensions are in millimeters (inches).
2. Tolerance is ± 0.25 mm (.010") unless otherwise noted.
3. Protruded resin under flange is 1.00mm (.039") max.

509VGC2E-C-1B

5mm Round, Red & Yellow Green, Bi-Color LED
Three Leads with One Common Cathode Type

Luckylight

Technical Data Sheet

Absolute Maximum Ratings at Ta=25°C

| Parameters | Symbol | Max. | Unit |
|-------------------------------------|-----------|---------------------|------|
| Power Dissipation | P_d | 60 | mW |
| | | 60 | |
| Peak Forward Current ^(a) | I_{FP} | 100 | mA |
| DC Forward Current ^(b) | I_F | 25 | mA |
| | | 25 | |
| Reverse Voltage | V_R | 5 | V |
| Operating Temperature Range | T_{opr} | -40°C to +80°C | |
| Storage Temperature Range | T_{stg} | -40°C to +85°C | |
| Soldering Temperature | T_{sld} | 260°C for 5 Seconds | |

Notes:

a. Derate linearly as shown in derating curve.

b. Duty Factor = 10%, Frequency = 1 kHz.

509VGC2E-C-1B

5mm Round, Red & Yellow Green, Bi-Color LED
Three Leads with One Common Cathode Type

Luckylight

Technical Data Sheet

Electrical Optical Characteristics at Ta=25°C







| Parameters | Symbol | Emitting Color | Min. | Typ. | Max. | Unit | Test Condition |
|------------------------------------|-------------------|----------------|------|------|------|------|--------------------|
| Luminous Intensity ^(a) | I _v | Red | 590 | 1300 | --- | mcd | IF=20mA |
| | | Yellow Green | 170 | 390 | --- | | |
| Viewing Angle ^(b) | 2θ _{1/2} | Red | --- | 30 | --- | deg. | IF=20mA |
| | | Yellow Green | --- | 30 | --- | | |
| Peak Emission Wavelength | λ _p | Red | --- | 632 | --- | nm | IF=20mA |
| | | Yellow Green | --- | 573 | --- | | |
| Dominant Wavelength ^(c) | λ _d | Red | --- | 624 | --- | nm | IF=20mA |
| | | Yellow Green | --- | 571 | --- | | |
| Spectral Line Half-Width | Δλ | Red | --- | 20 | --- | nm | IF=20mA |
| | | Yellow Green | --- | 20 | --- | | |
| Forward Voltage | V _F | Red | 1.6 | 2.0 | 2.4 | V | IF=20mA |
| | | Yellow Green | 1.6 | 2.0 | 2.4 | | |
| Reverse Current | I _R | Red | --- | --- | 10 | μA | V _R =5V |
| | | Yellow Green | --- | --- | 10 | | |

Notes:

- Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
- 2θ_{1/2} is the o-axis angle where the luminous intensity is 1/2 the peak intensity.
- The dominant wavelength (λ_d) is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.







Technical Data Sheet**Typical Electrical / Optical Characteristics Curves
(25°C Ambient Temperature Unless Otherwise Noted)**

Red:

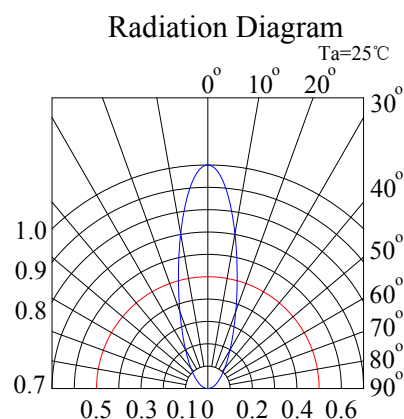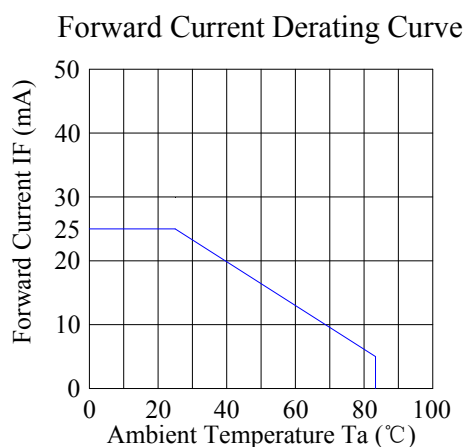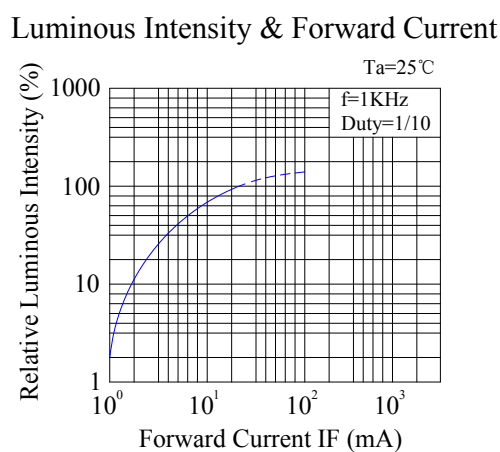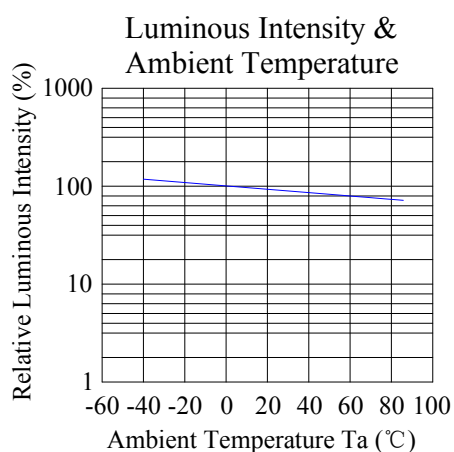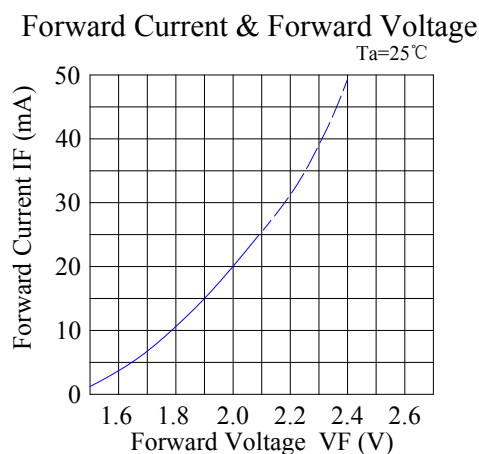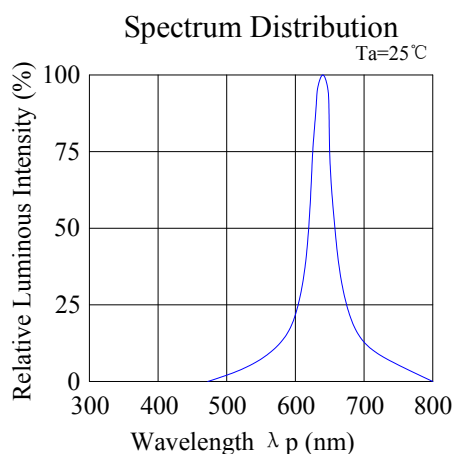

Technical Data Sheet

Yellow Green:

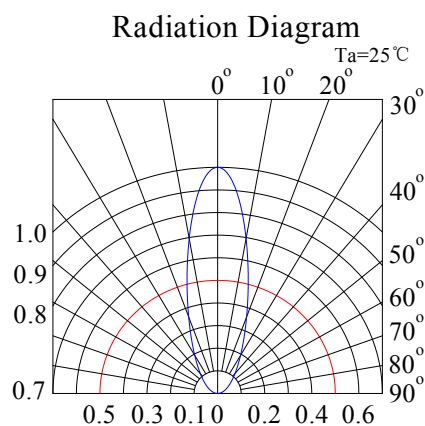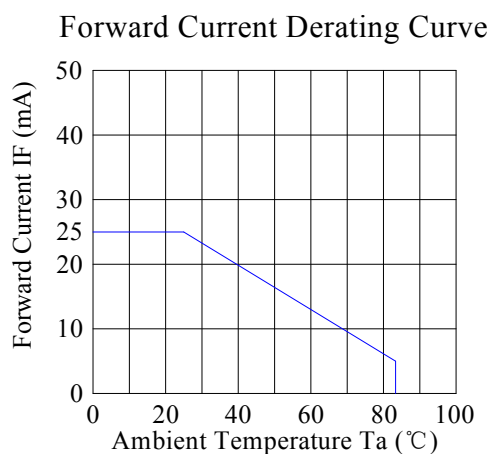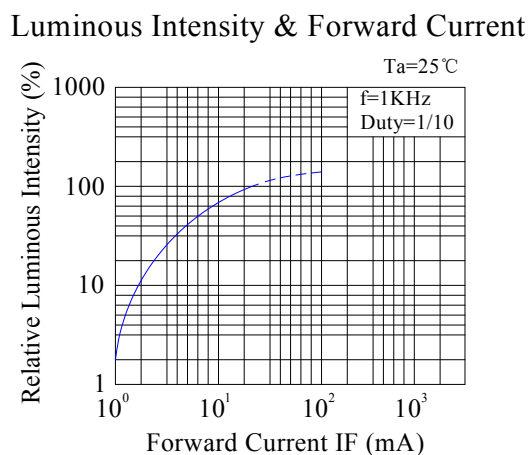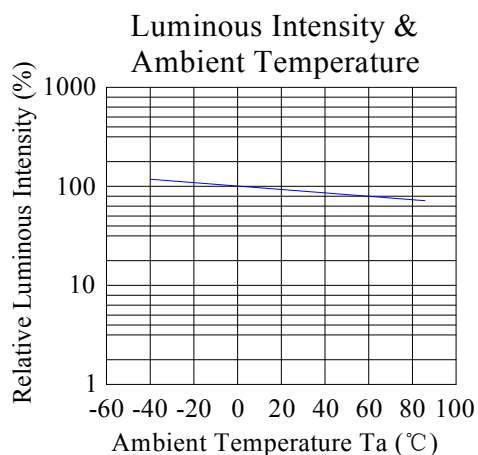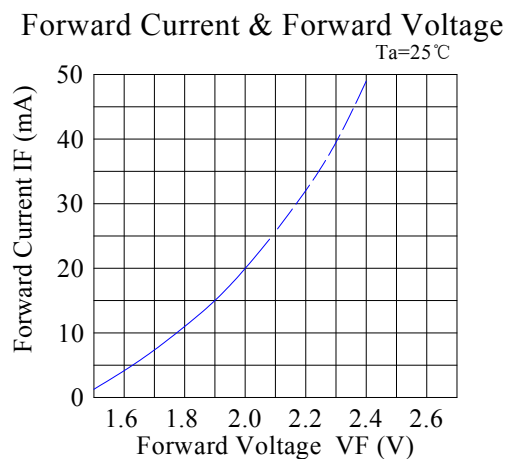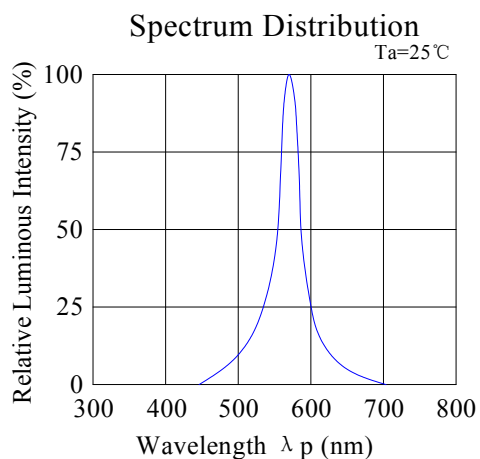


509VGC2E-C-1B

5mm Round, Red & Yellow Green, Bi-Color LED
Three Leads with One Common Cathode Type

Luckylight

Technical Data Sheet

Packing & Label Specifications:

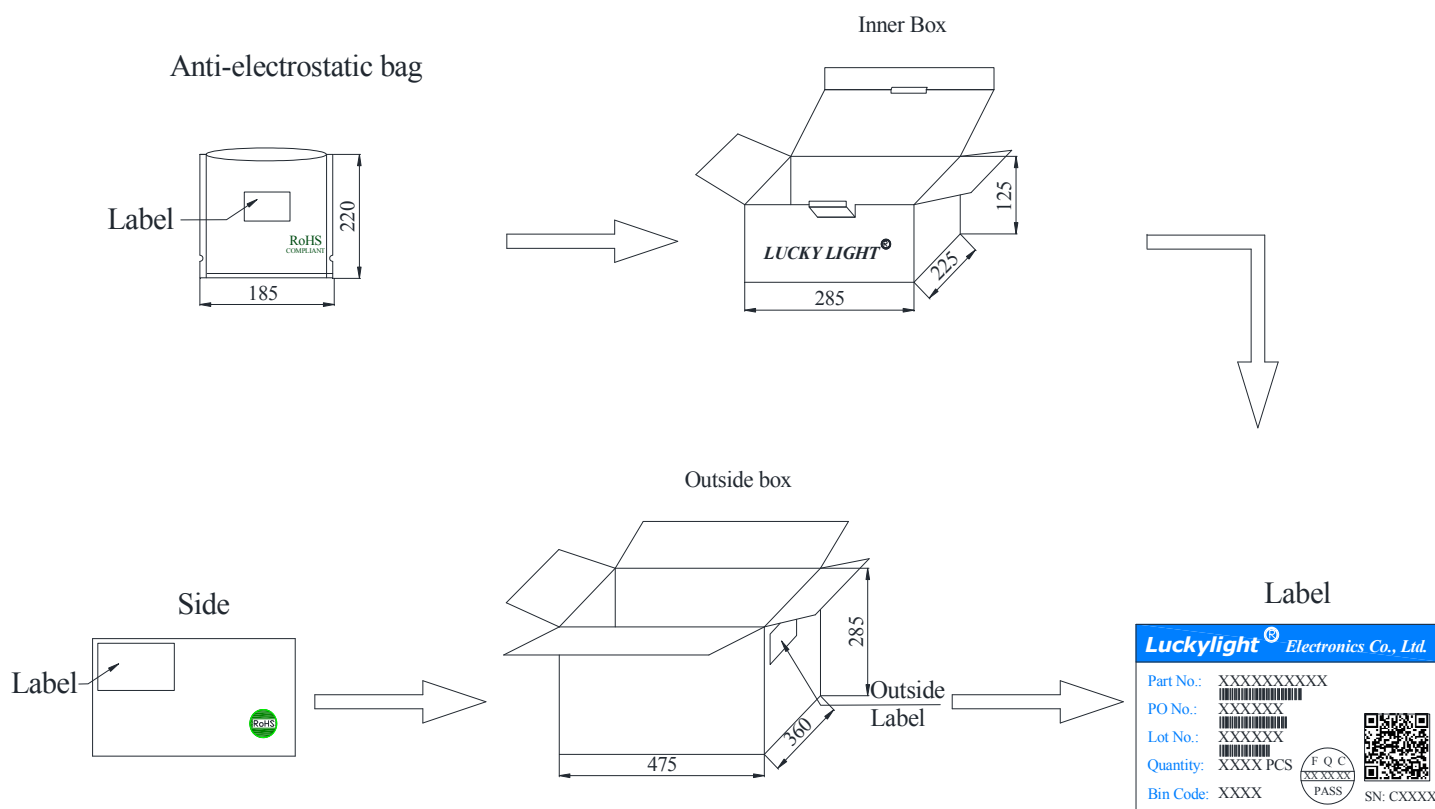

Packing Quantity:

- a. 1000 PCS/bag.
- b. 6000 PCS/Inner Box.
- c. 6 Inner Boxes/Outside Box.

Spec No.: B508X360

Issue No.: G-Rev-5

Luckylight Electronics Co., Ltd

Copyright © 2020 Luckylight All Rights Reserved

Date: 16-Mar-2020

E-mail: sales@luckylight.cn

http:// www.luckylight.cn

Page: 7 / 10

Technical Data Sheet

CAUTIONS**1. Over-current-proof**

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

2. Storage

2.1 The LEDs should be stored at 30°C or less and 70%RH or less after being shipped from Luckylight and the storage life limits are 3 months. If the LEDs are stored for 3 months or more, they can be stored for a year in a sealed container with a nitrogen atmosphere and moisture absorbent material.

2.2 Please avoid rapid transitions in ambient temperature, especially, in high humidity environments where condensation can occur.

3. Cleaning

Use alcohol-based cleaning solvents such as isopropyl alcohol to clean the LEDs if necessary.

4. Lead Forming & Assembly

During lead forming, the leads should be bent at a point at least 1.6mm from the base of LED lens. Do not use the base of the lead frame as a fulcrum during forming. Lead forming must be done before soldering, at normal temperature. During assembly on PCB, use minimum clinch force possible to avoid excessive mechanical stress.

5. Soldering


When soldering, for Lamp without stopper type and must be leave a minimum of 3mm clearance from the base of the lens to the soldering point. Do not apply any external stress to the lead frame during soldering while the LED is at high temperature.

Recommended soldering conditions:

| Soldering Iron | | Wave Soldering | |
|----------------|--------------------------------|----------------|--------------|
| Temperature | 300°C Max. | Pre-heat | 100°C Max. |
| Soldering Time | 3 sec. Max. (one time only) | Pre-heat Time | 60 sec. Max. |
| | | Solder Wave | 260°C Max. |
| | | Soldering Time | 5 sec. Max. |

Note:

- a. Excessive soldering temperature and / or time might result in deformation of the LED lens or catastrophic failure of the LED.

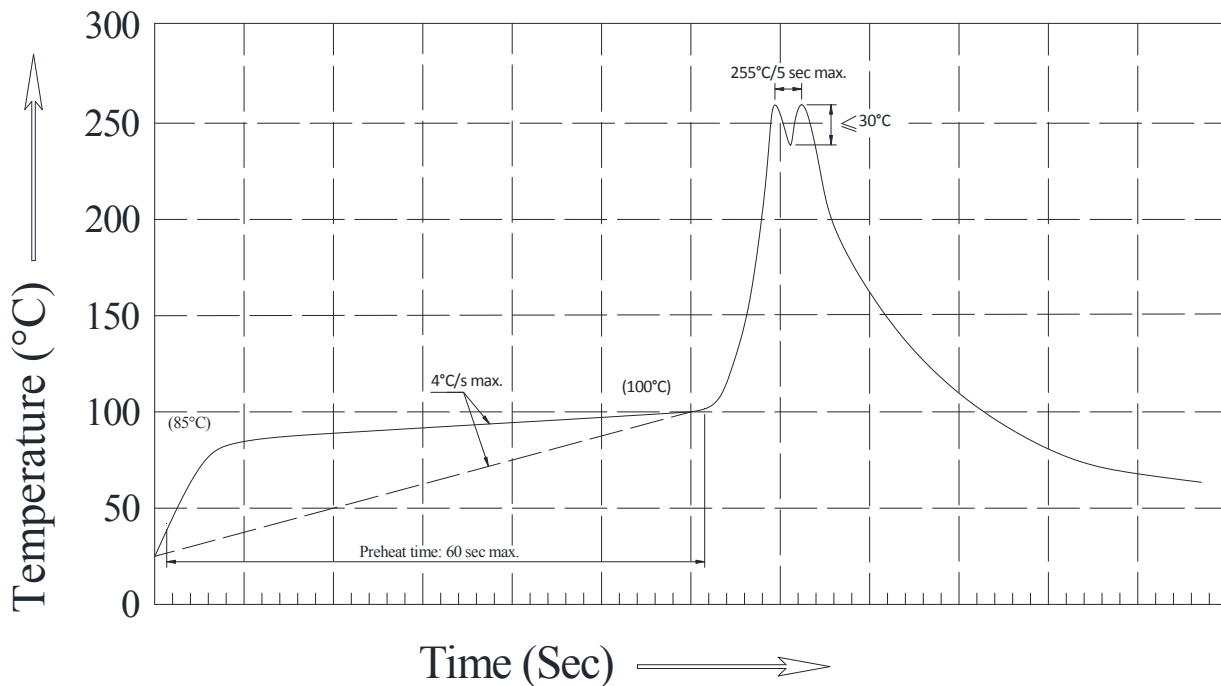Technical Data Sheet**Recommended Wave Soldering Profiles****Notes:**

- Recommend pre-heat temperature of 105° C or less (as measured with a thermocouple attached to the LED pins) prior to immersion in the solder wave with a maximum solder bath temperature of 260° C.
- Peak wave soldering temperature between 245° C ~ 255° C for 3 sec (5 sec max).
- Do not apply stress to the epoxy resin while the temperature is above 85° C.
- Fixtures should not incur stress on the component when mounting and during soldering process.
- SAC 305 solder alloy is recommended.
- No more than one wave soldering pass.

6. Drive Method

An LED is a current-operated device. In order to ensure intensity uniformity on multiple LEDs connected in parallel in an application, it is recommended that a current limiting resistor be incorporated in the drive circuit, in series with each LED as shown in Circuit A below.



(A) Recommended circuit

(B) The brightness of each LED might appear different due to the differences in the I-V characteristics of those LEDs.

Technical Data Sheet

7. Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used. It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

8. ESD (Electrostatic Discharge)

Static Electricity or power surge will damage the LED. Suggestions to prevent ESD damage:

- 8.1. Use a conductive wrist band or anti- electrostatic glove when handling these LEDs.
- 8.2. All devices, equipment, and machinery must be properly grounded.
- 8.3. Work tables, storage racks, etc. should be properly grounded.
- 8.4. Use ion blower to neutralize the static charge which might have built up on surface of the LEDs plastic lens as a result of friction between LEDs during storage and handing.

ESD-damaged LEDs will exhibit abnormal characteristics such as high reverse leakage current, low forward voltage, or “no light up” at low currents.

To verify for ESD damage, check for “light up” and VF of the suspect LEDs at low currents.

The VF of “good” LEDs should be $>2.0V@0.1mA$ for InGaN product and $>1.4V@0.1mA$ for AlInGaP product.

9. Others

- 9.1 The information included in this document reflects representative usage scenarios and is intended for technical reference only.
- 9.2 The part number, type, and specifications mentioned in this document are subject to future change and improvement without notice. Before production usage customer should refer to the latest datasheet for the updated specifications.
- 9.3 When using the products referenced in this document, please make sure the product is being operated within the environmental and electrical limits specified in the datasheet. If customer usage exceeds the specified limits, Luckylight will not be responsible for any subsequent issues.
- 9.4 The LEDs described here are intended to be used for ordinary electronic equipment (such as office equipment, communication equipment and household applications). Consult Luckylight’s Sales in advance for information on applications in which exceptional reliability is required, particularly when the failure or malfunction of the LEDs may directly jeopardize life or health, such as in aviation, transportation, traffic control equipment, medical and life support systems and safety devices.