KW4-S281AGA


0.28-inch (7.00 mm) Yellow-Green LED Display

Four Digit 7-segment Surface Mount LED Display

Technical Data Sheet

LuckyLight
Innovative Optoelectronic Solutions

Features



- High reliability.
- Low power consumption.
- Excellent characters appearance.
- Evenly lighted segments.
- Packaged in tape and reel for SMT manufacturing.
- The thickness is thinness than tradition through-hole LED display.
- I.C compatible.
- RoHS compliant.

Descriptions

- The KW4-S281AGA is a 0.28-inch (7.00mm) digit height surface mount 7-segment LED display.
- The display provides excellent reliability in bright ambient light.
- The device is available as either common anode or common cathode.
- The device is made with white diffused segments and gray surface.


Applications

- Home and smart appliances.
- Instrument panels.
- Display time and digital combination.
- Test and measurement equipment.
- Control units.

Part No.	Emitting Color	Circuit Common
KW4-S281AGA	Yellow-Green	Common Anode

Copyright © 2017-2026 Luckylight All Rights Reserved

Package DimensionS

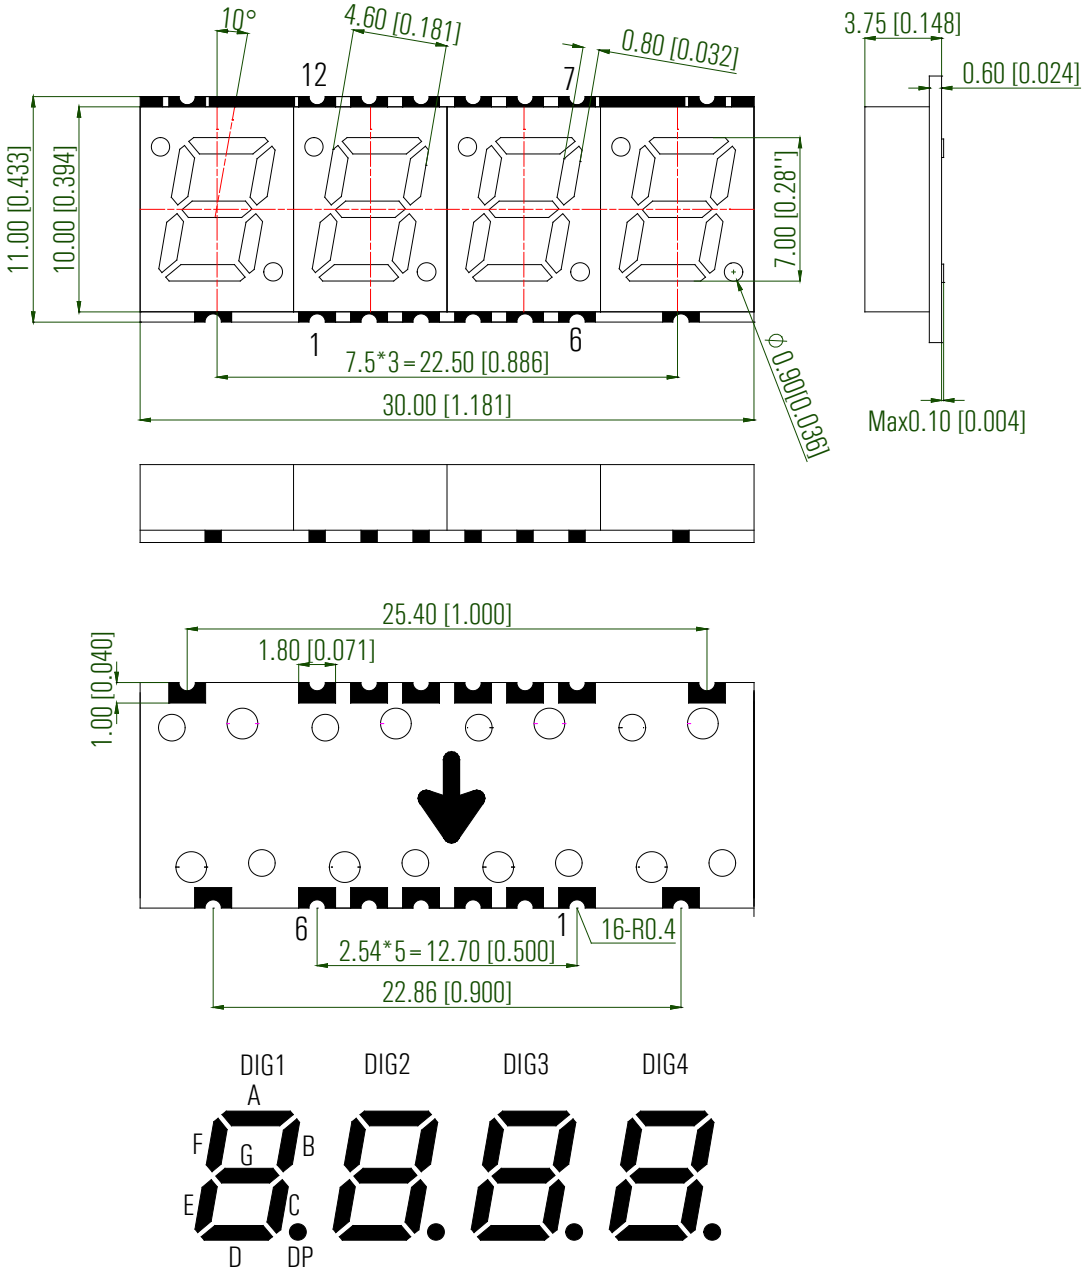


Notes:

1. *All dimensions are in millimeters (inches).*
2. *Tolerance is ± 0.25mm (.010") unless otherwise noted.*
3. *The gap between the reflector and PCB shall not exceed 0.25mm.*

Copyright © 2017-2026 Luckylight All Rights Reserved

Internal Circuit Diagram:

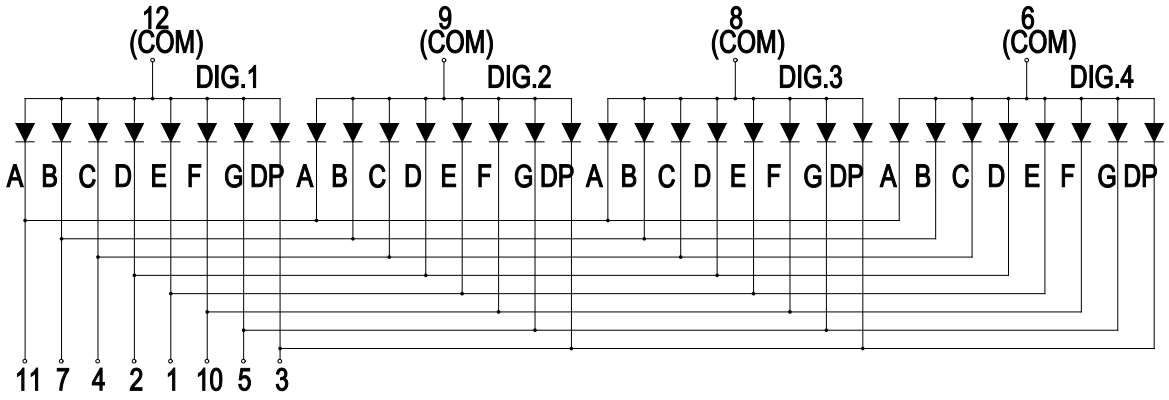

Copyright © 2017-2026 Luckylight All Rights Reserved

Absolute Maximum Ratings at Ta=25℃

Parameters	Symbol	Max	Unit
Power Dissipation (Per Chip)	P_D	48	mW
Peak Forward Current (Per Segment) (1/10 Duty Cycle, 0.1ms pulse width)	I_{FP}	40	mA
Forward Current (Per Segment)	I_F	20	mA
Reverse Voltage (Per Chip)	V_R	5	V
Operating Temperature Range	T_{opr}	-40℃ to +80℃	
Storage Temperature Range	T_{stg}	-40℃ to +85℃	
Soldering Temperature	T_{sld}	260℃ for 5 Seconds	

Electrical Optical Characteristics at Ta=25℃

Parameters	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Average Luminous Intensity	Iv	3.5	7.0	---	mcd	IF=10mA (Note a)
		7.0	14.0	---	mcd	IF=20mA (Note a)
Luminous Intensity Matching Ratio	I_{v-m}	---	---	2:1		IF=20mA
Peak Emission Wavelength	λp	---	575	---	nm	IF=20mA
Dominant Wavelength	λd	---	572	---	nm	IF=20mA (Note b)
Spectral Line Half-Width	Δλ	---	20	---	nm	IF=20mA
Forward Voltage (Per Segment)	V_F	---	2.0	2.4	V	IF=20mA (Note c)
Reverse Current (Per Segment)	I_R	---	---	50	μA	VR=5V

Notes:


a. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve. Tolerance of Luminous Intensity: ± 10%.


b. The dominant wavelength (λd) is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.


c. Tolerance of Forward Voltage: ± 0.1V.


Copyright © 2017-2026 Luckylight All Rights Reserved

Typical Electrical/Optical Characteristics Curves
(25℃ Ambient Temperature Unless Otherwise)

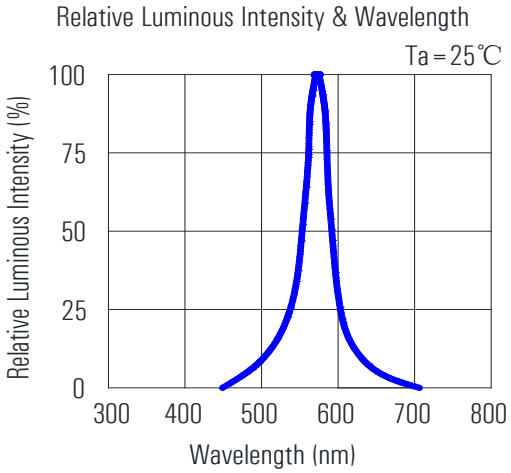

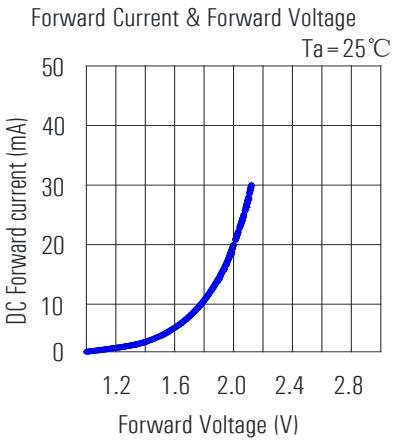


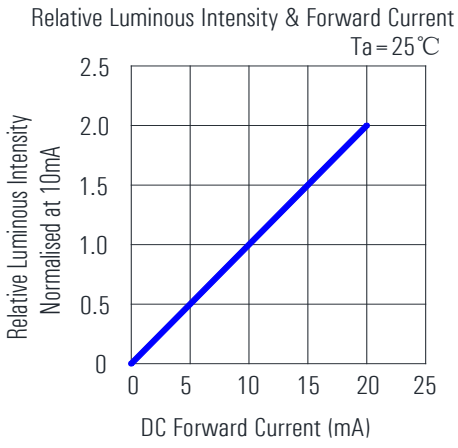

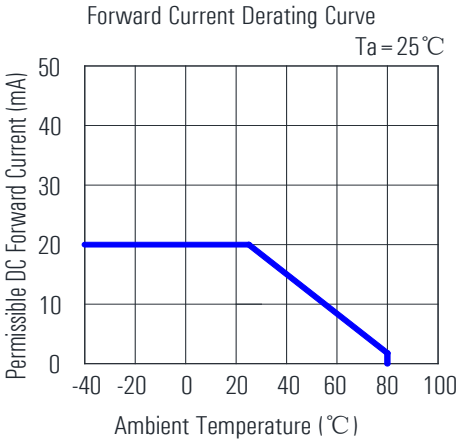


Copyright © 2017-2026 Luckylight All Rights Reserved

Reel Dimensions *(units: mm)*

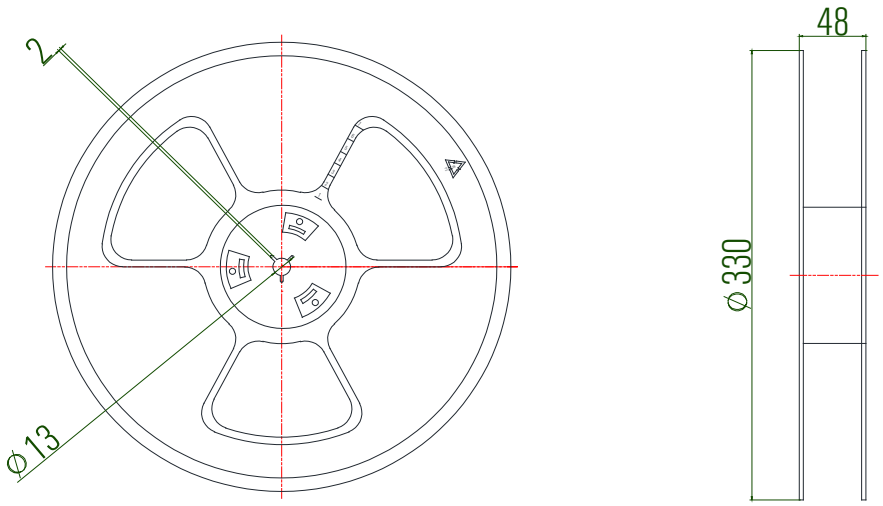


Tape Specifications *(units: mm)*

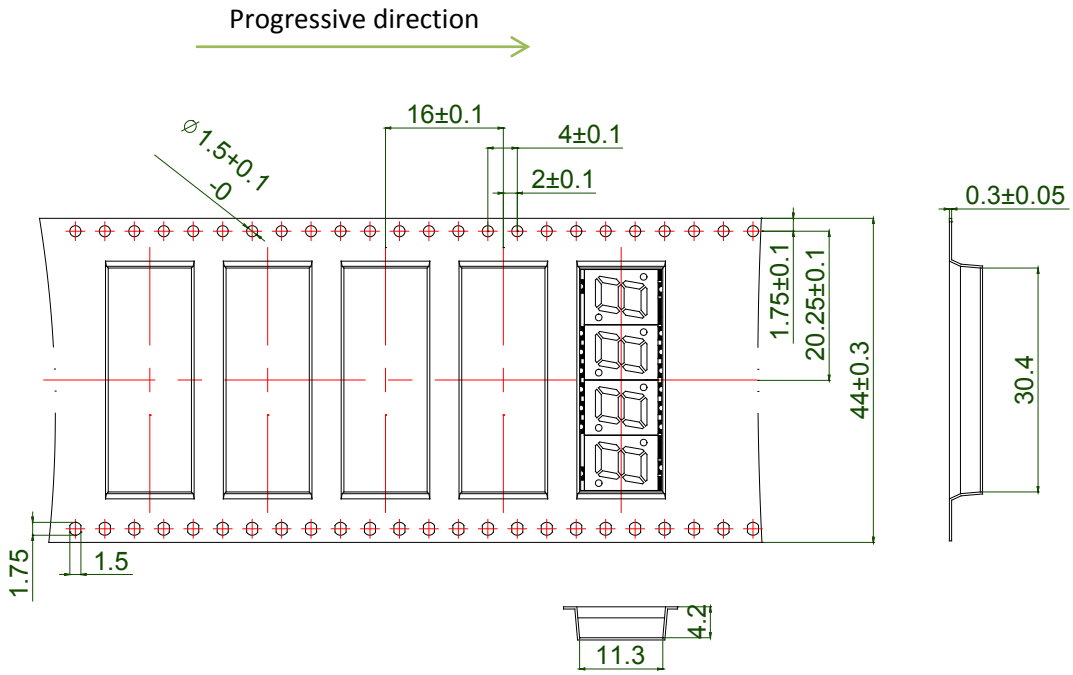

Note: Tolerances unless mentioned ±0.25mm.

Copyright © 2017-2026 Luckylight All Rights Reserved

Packing & Label Specifications

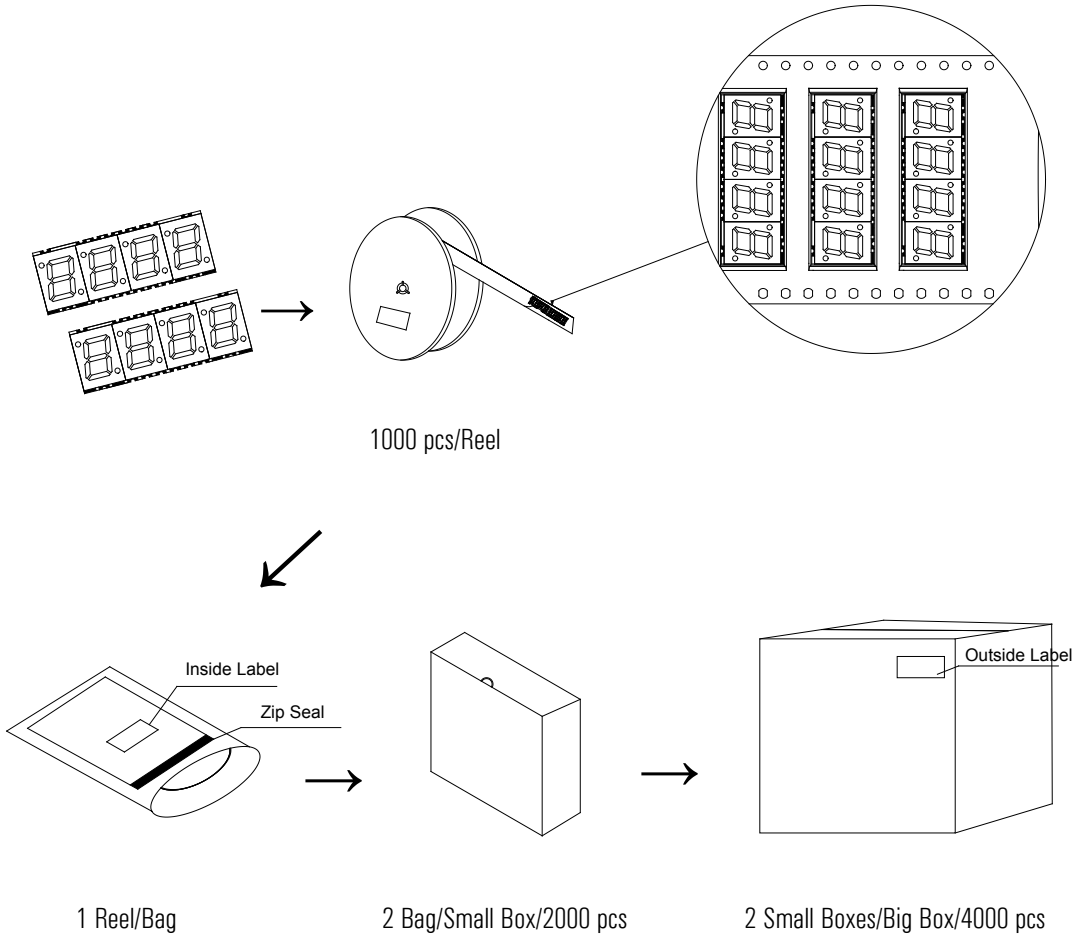


Copyright © 2017-2026 Luckylight All Rights Reserved

Precautions for Use

1. Caution in ESD

Static electricity and surge damages the LED. It is recommended to use a wrist band or anti-electrostatic glove when handling the LED. All devices equipment and machinery must be properly grounded.

2. Pb-Free Reflow Soldering Profile

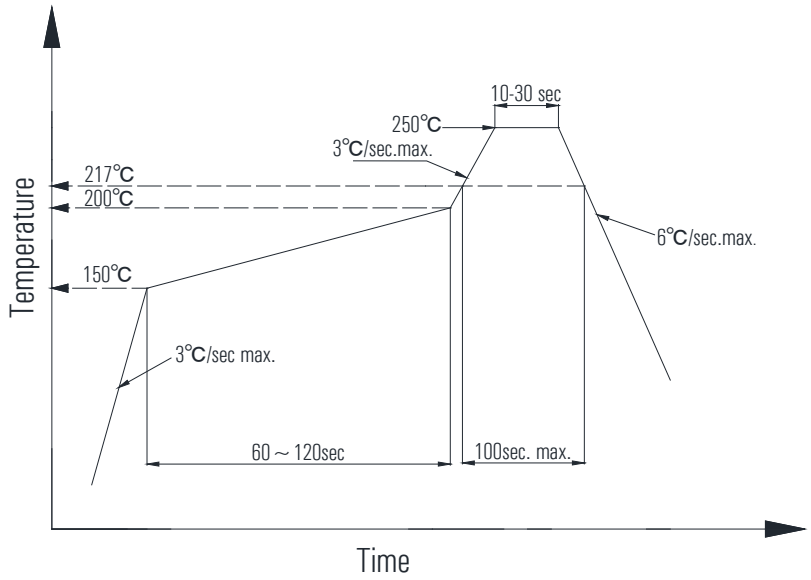

(Acc.to-STD-020C)

Notes:

Pre-heat		Other	
Temperature min	150℃	Liquidus Temperature	217℃
Temperature max	200°C	Time above Liquidus Temperature	100sec. max.
Time	60-120sec	Peak Temperature	250℃
Average ramp-up rate	3°C/sec. max.	Ramp- Down Rate from Peak Temperature	6°C/sec. max.
		Reflow times	1 time


a. Reflow soldering is recommended. Other soldering methods are not recommended as they might cause damage to the product.

b. All parameters are maximum body case temperature values and cannot be considered as a soldering profile. The body case temperature was measured by soldering a thermal couple to the soldering point of LEDs.

c. No more than one reflow welding is recommended.

Copyright © 2017-2026 Luckylight All Rights Reserved

3. Recommended Soldering Pattern

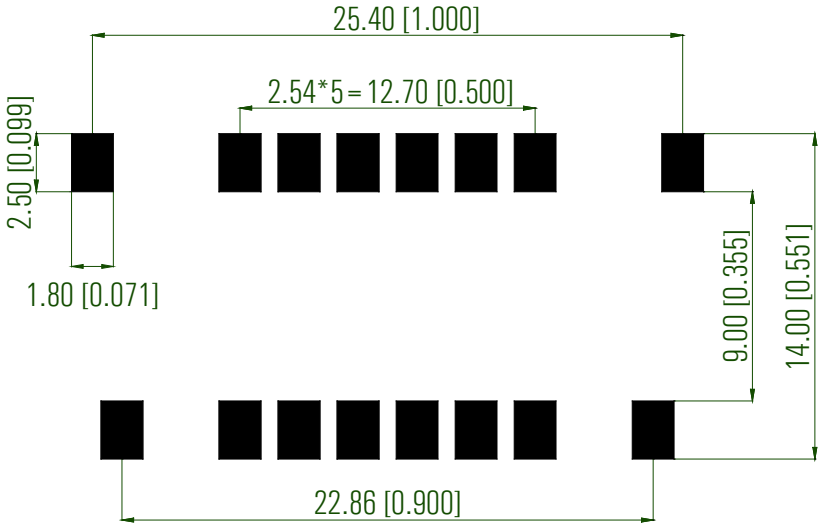

Copyright © 2017-2026 Luckylight All Rights Reserved

4. Circuit Design Notes:

a. Protective current-limiting resistors may be necessary to operate the LEDs within the specified range.
b. LEDs mounted in parallel should each be placed in series with its own current-limiting resistor.
c. The driving circuit should be designed to protect the LED against reverse voltages and transient voltage spikes when the circuit is powered up or shut down.
d. The safe operating current should be chosen after considering the maximum ambient temperature of the operating environment.



5. Terms and conditions for the usage of this document

1. The information included in this document reflects representative usage scenarios and is intended for technical reference only.
2. The part number, type, and specifications mentioned in this document are subject to future change and improvement without notice. Before production usage customer should refer to the latest datasheet for the updated specifications.
3. When using the products referenced in this document, please make sure the product is being operated within the environmental and electrical limits specified in the datasheet. If customer usage exceeds the specified limits, Luckylight will not be responsible for any subsequent issues.
4. The information in this document applies to typical usage in consumer electronics applications. If customer's application has special reliability requirements or have life-threatening liabilities, such as automotive or medical usage, please consult with Luckylight representative for further assistance.
5. The contents and information of this document may not be reproduced or re-transmitted without permission by Luckylight.
6. The LEDs should be operated with forward bias. The driving circuit must be designed so that the LEDs are not subjected to forward or reverse voltage while it is off. If reverse voltage is continuously applied to the LEDs, it may cause migration resulting in LED damage.
7. Sundries and stains are controlled within 0.2mm, which can be passed.

Copyright © 2017-2026 Luckylight All Rights Reserved

Disclaimer

The information contained in this document is provided for technical reference only and is based on representative operating conditions.

Product part numbers, configurations, specifications and other information contained herein are subject to change or improvement without prior notice. Before product selection, design-in or mass production, customers should refer to the latest version of this datasheet and confirm the applicable specifications.

The products described in this document must be operated within the electrical, mechanical and environmental ratings specified herein. LuckyLight shall not be liable for any malfunction, damage or loss resulting from operation outside the specified ratings or from improper handling, installation or use.

The products described in this document are intended for use in standard industrial and electronic equipment, including industrial control equipment, automation systems, communication equipment, office equipment and general electronic devices.

For applications requiring exceptionally high levels of reliability or safety, where product failure could directly result in personal injury, loss of life or significant property damage, including aerospace systems, transportation systems, traffic control equipment, medical life-support equipment and safety-critical devices,please contact a LuckyLight sales representative in advance for technical evaluation and written approval.

No part of this document may be reproduced, distributed or transmitted in any form or by any means without prior written permission from LuckyLight.

Copyright © 2017-2026 Luckylight All Rights Reserved

Revision History

Revision	Date	Contents	Page
Rev. 1	June 5, 2006	Original Version	/
Rev. 2	December 10, 2012	Update the layout of the specifications data sheet	/
Rev. 3	March 16, 2017	Update the company logo, product images,	
Rev. 4	September 20, 2026	Optimized the recommended soldering pattern and internal PCB layout and Dimensions	2, 9
		2 Small Boxes/Big Box	7

Copyright © 2017-2026 Luckylight All Rights Reserved