

C3535DUVC-QB-Q5-D

3.5×3.5mm, UVC 275nm+UVA 395nm LED

Surface Mount Sterilization LED

LuckyLight

Technical Data Sheet

Features:

- High optical output power
- Long life and low light attenuation
- Environmental protection, energy saving and high reliability
- Durable, shock-proof, easy to design, suitable for multifield applications
- Built-in UVC wavelength chip, unique design and application more widely

Applications:

- Disinfection Sterilization.
- Ozone generator.
- QA equipment.
- Ultraviolet detection、communication technology
- Air sterilization, water sterilization
- Medical treatment and skin disease treatment

Part No.	Emitting Color	Lens Color
C3535DUVC-QB-Q5-D	UVC+UVA	Quartz glass

Spec No.: C3535

Issue No.: G-Rev-4

LuckyLight Electronics Co., Ltd

Copyright © 2021 LuckyLight All Rights Reserved

Date: 22-Mar-2021

E-mail: sales@luckylight.cn

http:// www.luckylight.cn

Page: 1 / 9

C3535DUVC-QB-Q5-D




3.5×3.5mm, UVC 275nm+UVA 395nm LED

Surface Mount Sterilization LED

Luckylight


Technical Data Sheet

Package Dimension:

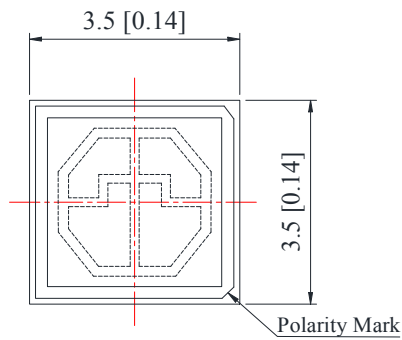

Polarity

Recommended Soldering Pad Dimensions

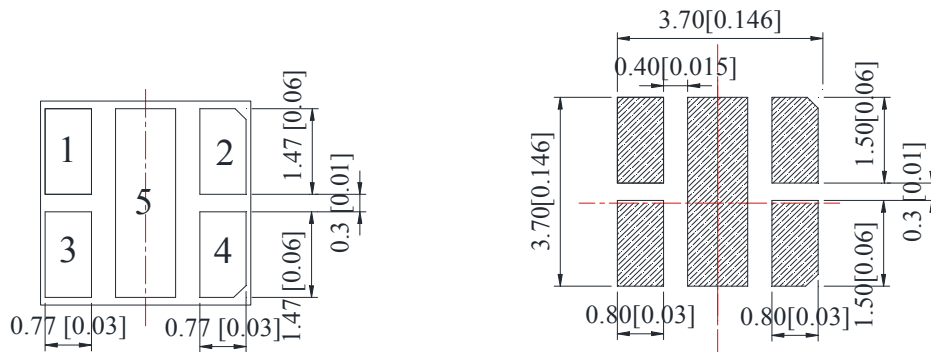

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is ± 0.25 mm (.010") unless otherwise noted.

C3535DUVC-QB-Q5-D

3.5×3.5mm, UVC 275nm+UVA 395nm LED

Surface Mount Sterilization LED

LuckyLight

Technical Data Sheet

Absolute Maximum Ratings at Ta=25°C

Parameters	Symbol	Max.	Unit
DC Forward Current	UVA I_F	150	mA
	UVC I_F	50	mA
Junction Temperature	T_a	90	°C
Operating Temperature Range	T_{opr}	-40°C to +85°C	
Storage Temperature Range	T_{stg}	-40°C to +85°C	
Soldering Temperature	T_{sld}	260°C for 5 Seconds	

Electrical Optical Characteristics at Ta=25°C

Parameters	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Radiant flux $t^{(a)}$	Φ_e	3	5	---	mW	IF=40mA
Viewing Angle	$2\theta_{1/2}$	---	120	---	Deg	IF=40mA
Peak Emission Wavelength $t^{(b)}$	λ_p	270	275	280	nm	IF=40mA
Spectral Line Half-Width	$\Delta\lambda$	---	10	---	nm	IF=40mA
Thermal Resistance Junction To Board	$R_{\theta J-B}$	---	10	---	°C/W	IF=40mA
Forward Voltage $t^{(c)}$	V_F	5.5	6.0	7.0	V	IF=40mA
Reverse Current	I_R	---	---	10	μA	VR=5V

Parameters	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Radiant flux $t^{(a)}$	Φ_e	20.0	40.0	---	mW	IF=100mA
Viewing Angle	$2\theta_{1/2}$	---	120	---	Deg	IF=100mA
Peak Emission Wavelength $t^{(b)}$	λ_p	390	395	400	nm	IF=100mA
Spectral Line Half-Width	$\Delta\lambda$	---	10	---	nm	IF=100mA
Thermal Resistance Junction To Board	$R_{\theta J-B}$	---	8	---	°C/W	IF=100mA
Forward Voltage $t^{(c)}$	V_F	2.8	3.2	3.6	V	IF=100mA
Reverse Current	I_R	---	---	10	μA	VR=5V

Notes:

a. Luminous flux measurement tolerance: ±10%.

b. Color coordinates measurement tolerance: ±0.015 Wavelength measurement tolerance: ±1nm

c. Forward voltage measurement tolerance: ±0.1V

Spec No.: C3535

Issue No.: G-Rev-4

LuckyLight Electronics Co., Ltd

Copyright © 2021 LuckyLight All Rights Reserved

Date: 22-Mar-2021

E-mail: sales@luckylight.cn

http:// www.luckylight.cn

Page: 3 / 9

C3535DUVC-QB-Q5-D

3.5×3.5mm, UVC 275nm+UVA 395nm LED


Surface Mount Sterilization LED

Luckylight

Technical Data Sheet

Typical Electrical / Optical Characteristics Curves (25°C Ambient Temperature Unless Otherwise Noted)

QB:

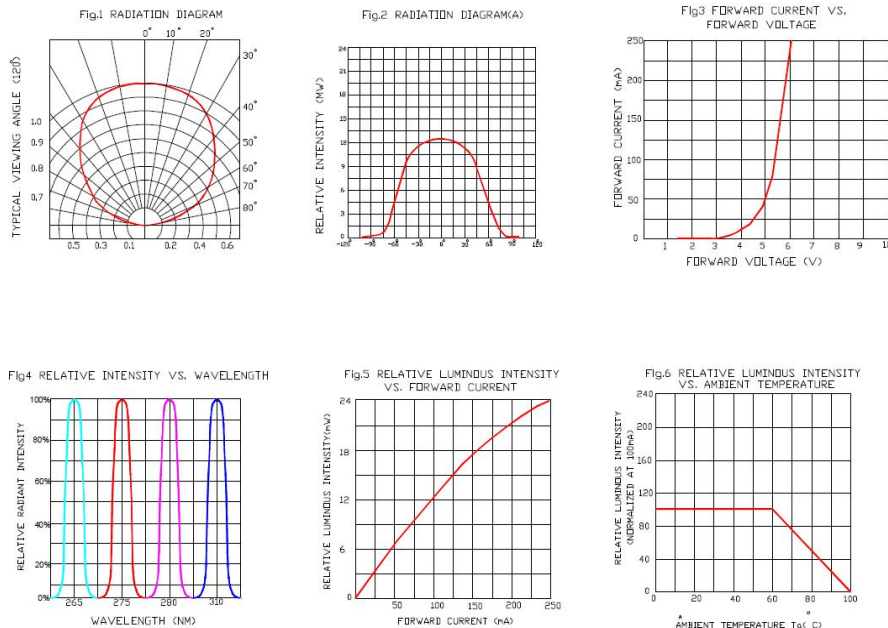

Q5:

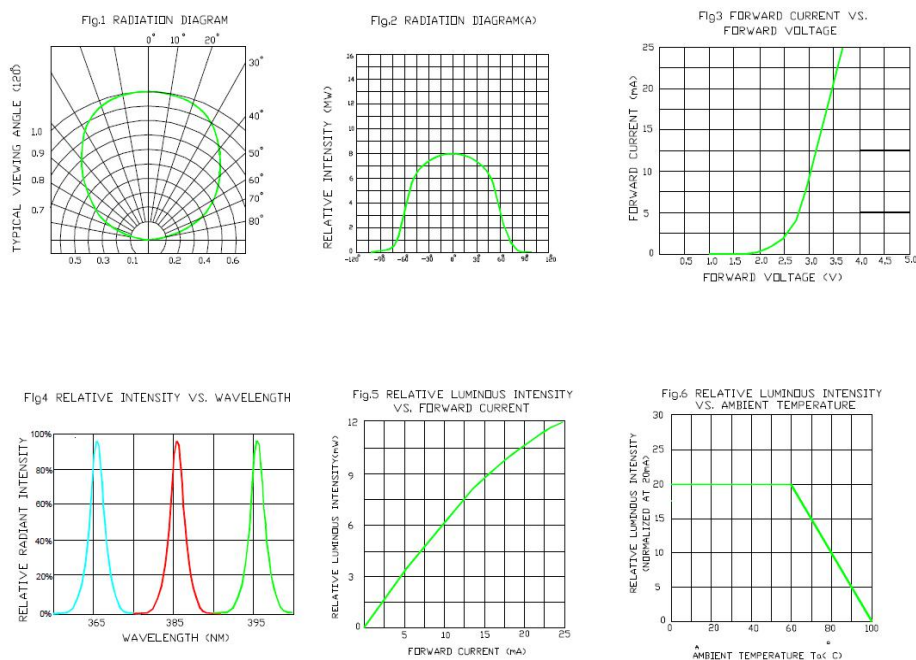


Figure 4: Typic radiation patter

Spec No.: C3535

Issue No.: G-Rev-4

Luckylight Electronics Co., Ltd

Copyright © 2021 Luckylight All Rights Reserved

Date: 22-Mar-2021

E-mail: sales@luckylight.cn

http:// www.luckylight.cn

Page: 4 / 9

C3535DUVC-QB-Q5-D

3.5×3.5mm, UVC 275nm+UVA 395nm LED


Surface Mount Sterilization LED

LuckyLight

Technical Data Sheet

Packing & Label Specifications:

Moisture Resistant Packaging:

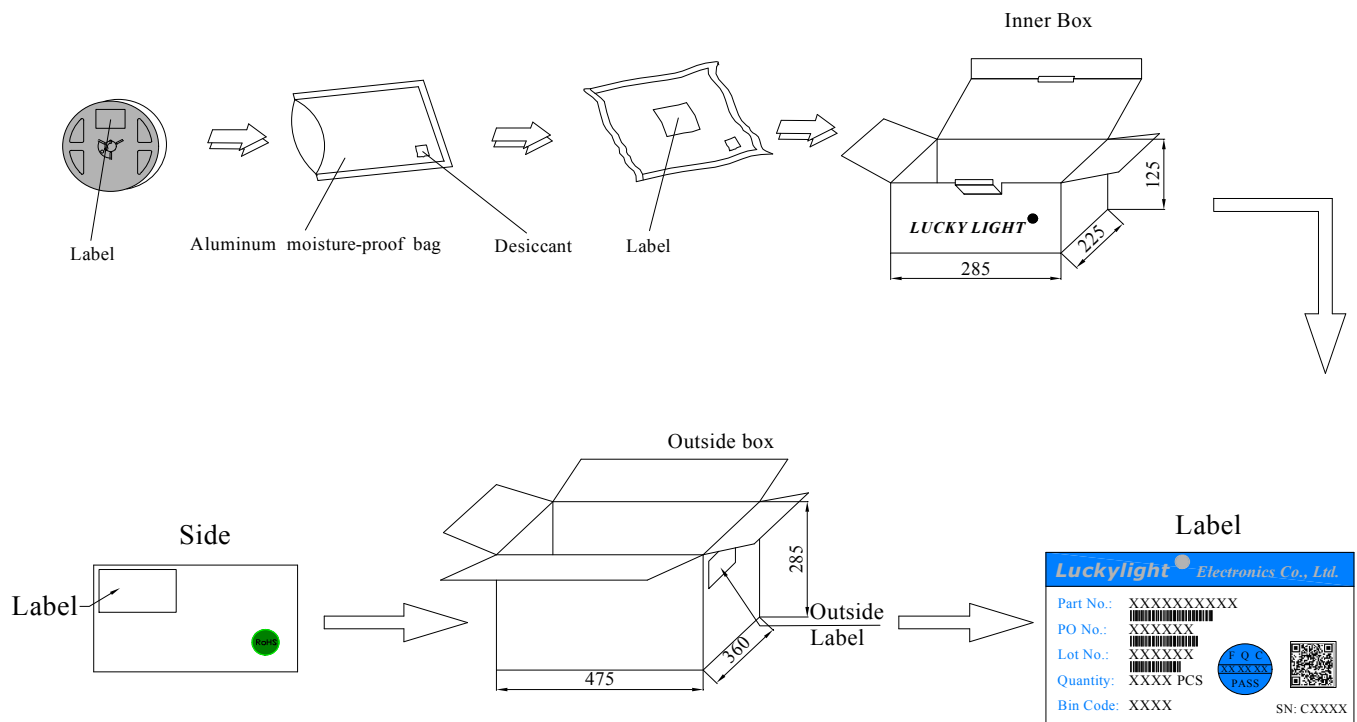

Spec No.: C3535

Issue No.: G-Rev-4

LuckyLight Electronics Co., Ltd

Copyright © 2021 LuckyLight All Rights Reserved

Date: 22-Mar-2021

E-mail: sales@luckylight.cn

http:// www.luckylight.cn

Page: 5 / 9

C3535DUVC-QB-Q5-D


3.5×3.5mm, UVC 275nm+UVA 395nm LED

Surface Mount Sterilization LED

Luckylight


Technical Data Sheet

Reel Dimensions:

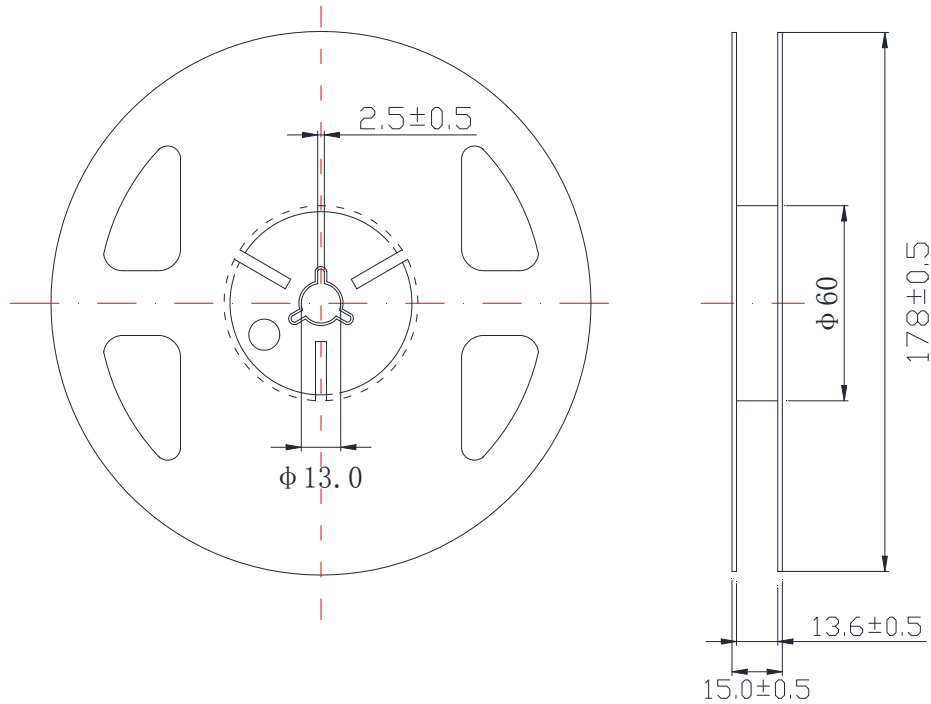

Carrier Tape Dimensions:

Loaded quantity 1000 PCS per reel.

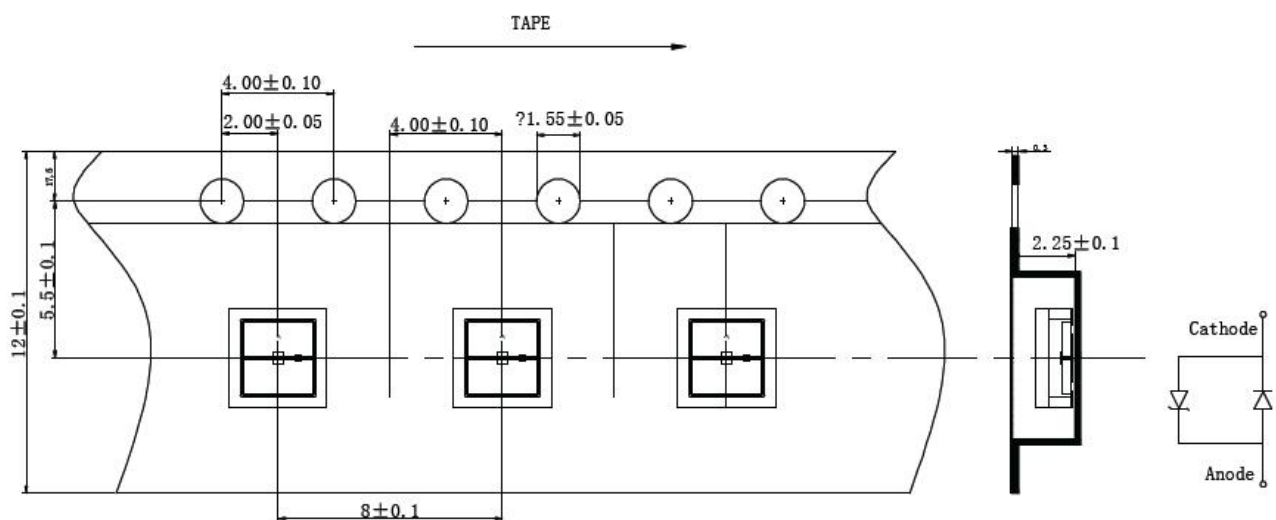

Spec No.: C3535

Issue No.: G-Rev-4

Luckylight Electronics Co., Ltd

Copyright © 2021 Luckylight All Rights Reserved

Date: 22-Mar-2021

E-mail: sales@luckylight.cn

http:// www.luckylight.cn


Page: 6 / 9

Technical Data Sheet

CAUTIONS

1. Handling Precautions:

- 1.1 Handle the component along the side surfaces by using forceps or appropriate tools.
- 1.2 Do not directly touch or handle the silicone lens surface. It may damage the internal circuitry.
- 1.3 Do not stack together assembled PCBs containing exposed LEDs. Impact may scratch the silicone lens or damage the internal circuitry.

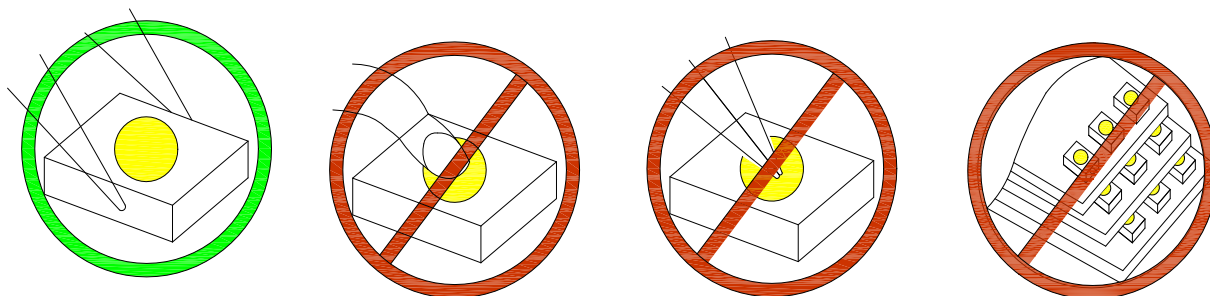

- 1.4 Compare to epoxy encapsulant that is hard and brittle, silicone is softer and flexible. Although its characteristic significantly reduces thermal stress, it is more susceptible to damage by external mechanical force. As a result, special handling precautions need to be observed during assembly using silicone encapsulated LED products. Failure to comply might lead to damage and premature failure of the LED.


2. Storage:

- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package, the LEDs should be kept at 30°C or less and 60%RH or less.
- 2.3 The LEDs should be used within a year.
- 2.4 After opening the package, the LEDs should be kept at 30°C or less and 60%RH or less.
- 2.5 The LEDs should be used within 24 hours after opening the package.
- 2.6 If the moisture adsorbent material has fabled away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions. Baking treatment: 65±5°C for 24 hours.

Technical Data Sheet

3. Soldering Condition:

3.1 Pb-free solder temperature profile.

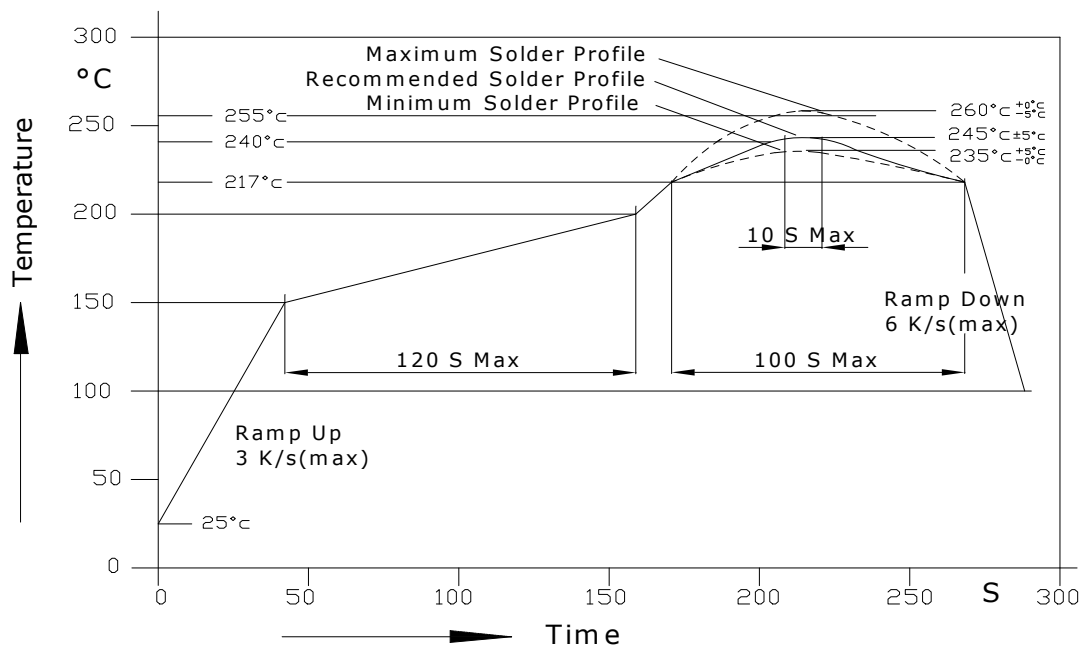

3.2 Reflow soldering should not be done more than two times.

3.3 When soldering, do not put stress on the LEDs during heating.

3.4 After soldering, do not warp the circuit board.

3.5 Recommended soldering conditions:

Reflow soldering		Soldering iron	
Pre-heat	150~200°C	Temperature	300°C Max.
Pre-heat time	120 sec. Max.	Soldering time	3 sec. Max.
Peak temperature	260°C Max.		(one time only)
Soldering time	10 sec. Max. (Max. two times)		

3.6 Because different board designs use different number and types of devices, solder pastes, reflow ovens, and circuit boards, no single temperature profile works for all possible combinations.


However, you can successfully mount your packages to the PCB by following the proper guidelines and PCB-specific characterization.

Technical Data Sheet


4. Drive Method:

4.1 An LED is a current-operated device. In order to ensure intensity uniformity on multiple LEDs connected in parallel in an application, it is recommended that a current limiting resistor be incorporated in the drive circuit, in series with each LED as shown in Circuit A below.

Circuit model A

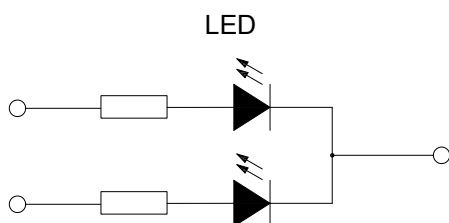

Circuit model B

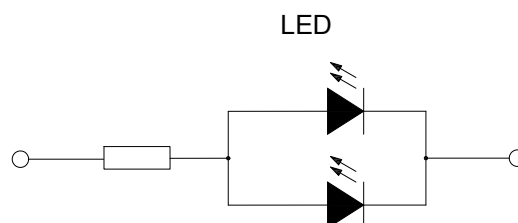

(A) Recommended circuit.

(B) The brightness of each LED might appear different due to the differences in the I-V characteristics of those LEDs.

Terms and conditions for the usage of this document:

1. The information included in this document reflects representative usage scenarios and is intended for technical reference only.
2. The part number, type, and specifications mentioned in this document are subject to future change and improvement without notice. Before production usage customer should refer to the latest datasheet for the updated specifications.
3. When using the products referenced in this document, please make sure the product is being operated within the environmental and electrical limits specified in the datasheet. If customer usage exceeds the specified limits, Luckylight will not be responsible for any subsequent issues.
4. The information in this document applies to typical usage in consumer electronics applications. If customer's application has special reliability requirements or have life-threatening liabilities, such as automotive or medical usage, please consult with Luckylight representative for further assistance.
5. The contents and information of this document may not be reproduced or re-transmitted without permission by Luckylight.