

## C3535RGBWC-001

3.5\*3.5mm, 1W Multi Color LED

1W Power LED Light Source

LuckyLight

### Technical Data Sheet

---

#### Features:

- Small SMT ceramic package with high efficiency.
- Optical indicator.
- Colorless clear window.
- Ideal for backlight and light pipe application.
- Wide viewing angle.
- Suitable for automatic placement equipment.
- Available on tape and reel (8mm Tape).
- The product itself will remain within RoHS compliant Version

#### Descriptions:

- The C3535 series is available in soft red, orange, yellow, green, blue and white. Due to the package design, the LED has wide viewing angle and optimized light coupling by inter reflector. This feature makes the SMT TOP LED ideal for light pipe application. The low current requirement makes this device ideal for portable equipment or any other application where power is at a premium.

#### Applications:

- Architectural lighting
- Channel backlighting
- Contour lighting
- Retail Display lighting
- Decorative lighting
- Garden lighting


# C3535RGBWC-001

3.5\*3.5mm, 1W Multi Color LED  
1W Power LED Light Source

## Technical Data Sheet

Part No.	Emitting Color
C3535RGBWC-001	Multi Color

### Package Dimension:

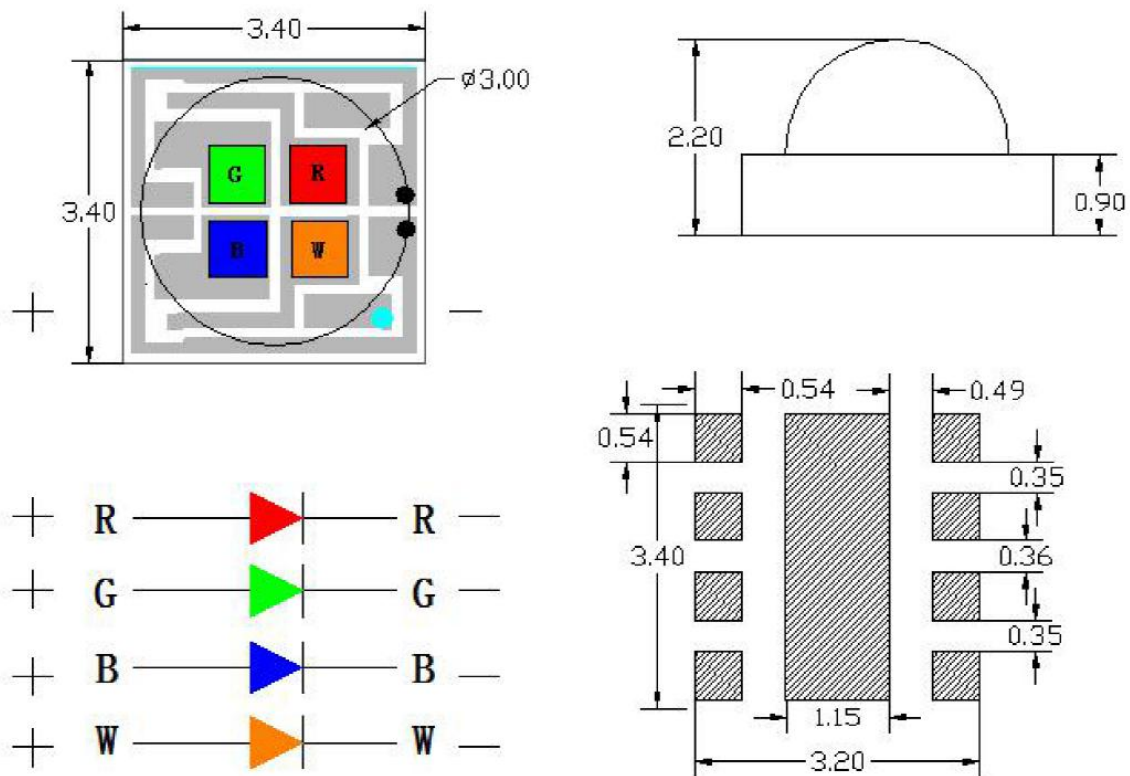

### Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.25$  mm (.010") unless otherwise noted.

## C3535RGBWC-001

3.5\*3.5mm, 1W Multi Color LED

1W Power LED Light Source

Luckylight

### Technical Data Sheet

#### Absolute Maximum Ratings at Ta=25°C

Parameters	Symbol	MAX	Unit
Power Dissipation	Hyper Red	910	mW
	Pure Green	1260	
	Blue	1260	
	White	1260	
Peak Forward Current <sup>(a)</sup>	Hyper Red	500	mA
	Pure Green	500	
	Blue	500	
	White	500	
Continuous Forward Current <sup>(b)</sup>	Hyper Red	350	mA
	Pure Green	350	
	Blue	350	
	White	350	
Reverse Voltage	VR	5	V
Operating Temperature Range	Topr	-40°C to +80°C	
Storage Temperature Range	Tstg	-40°C to +85°C	

#### Notes:

a. Derate linearly as shown in derating curve.

b. Duty Factor = 10%, Frequency = 1 kHz

# C3535RGBWC-001

3.5\*3.5mm,1W Multi Color LED

1W Power LED Light Source

## Technical Data Sheet

### Electrical Optical Characteristics at Ta=25°C

Parameters	Symbol	Emitting Color	Min.	Typ.	Max.	Unit	Test Condition
Luminous Flux <sup>(a)</sup>	$\Phi_v$	Hyper Red	30	40	---	lm	IF=350mA
		Pure Green	65	80	---		
		Blue	20	25	---		
		White	70	90	---		
Viewing Angle <sup>(b)</sup>	2 $\theta$ 1/2	Hyper Red	---	120	---	Deg	IF=350mA
		Pure Green	---	120	---		
		Blue	---	120	---		
		White	---	120	---		
Peak Emission Wavelength	$\lambda_p$	Hyper Red	---	632	---	nm	IF=350mA
		Pure Green	---	520	---		
		Blue	---	468	---		
Dominant Wavelength <sup>(c)</sup>	$\lambda_d$	Hyper Red	---	624	---	nm	IF=350mA
		pure Green	---	525	---		
		Blue	---	470	---		
Color Temperature	CCT	White	---	6500k	---	K	
Spectral Line Half-Width	$\Delta\lambda$	Hyper Red	---	20	---	nm	IF=350mA
		Pure Green	---	35	---		
		Blue	---	25	---		
Forward Voltage	VF	Hyper Red	1.80	2.10	2.60	V	IF=350mA
		Pure Green	2.80	3.20	3.60		
		Blue	2.80	3.20	3.60		
		White	2.80	3.20	3.60		
Reverse Current	IR	Hyper Red	---	---	50	$\mu$ A	VR=5V
		Pure Green	---	---	50		
		Blue	---	---	50		
		White	---	---	50		

#### Notes:

a. ALuminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.

Spec No.: C3535

Issue No.: G-Rev-4

LuckyLight Electronics Co., Ltd

Copyright © 2017 LuckyLight All Rights Reserved

Date: 12-Sep-2017

E-mail: sales@luckylight.cn

http:// www.luckylight.cn

Page: 4 / 9

# C3535RGBWC-001

3.5\*3.5mm, 1W Multi Color LED

1W Power LED Light Source









## Technical Data Sheet

b.  $2\theta_{1/2}$  is the  $\theta$ -axis angle where the luminous intensity is  $1/2$  the peak intensity

c. The dominant wavelength ( $\lambda_d$ ) is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.

### Typical Electrical / Optical Characteristics Curves (25°C Ambient Temperature Unless Otherwise Noted)

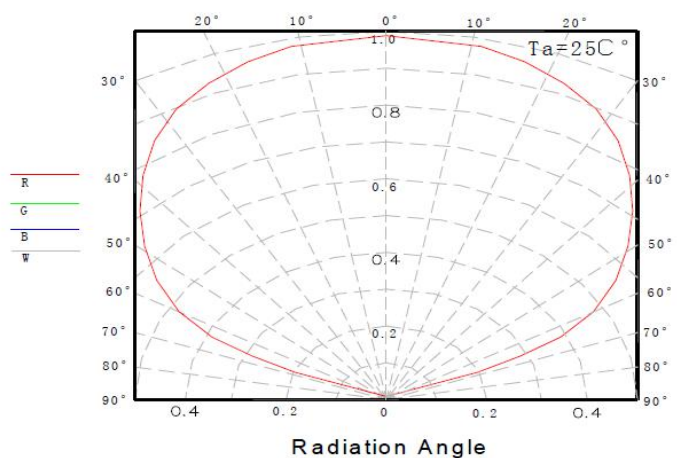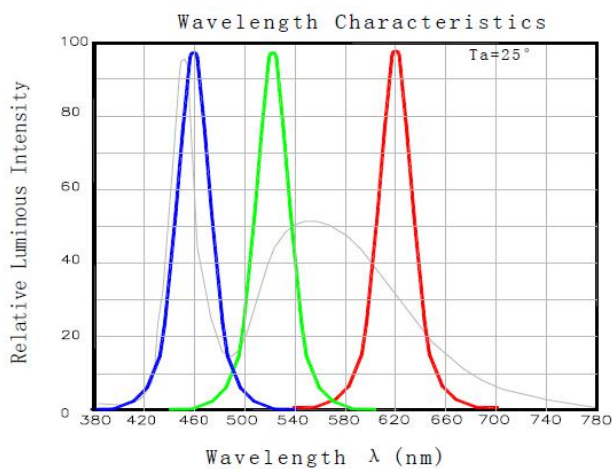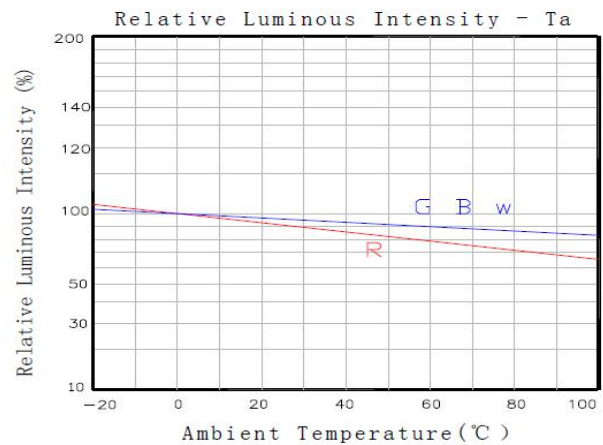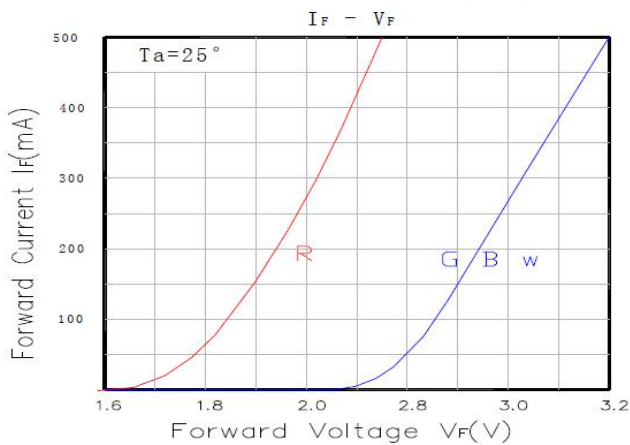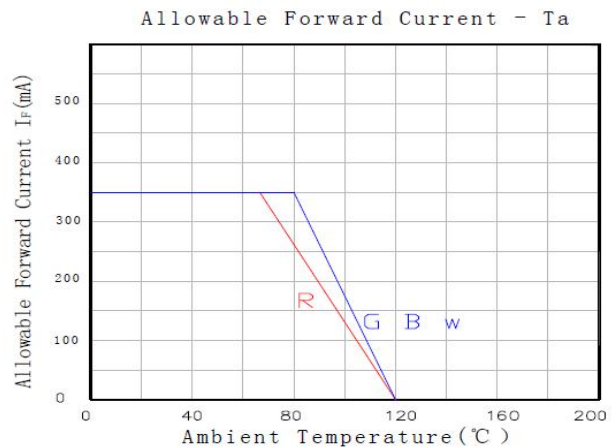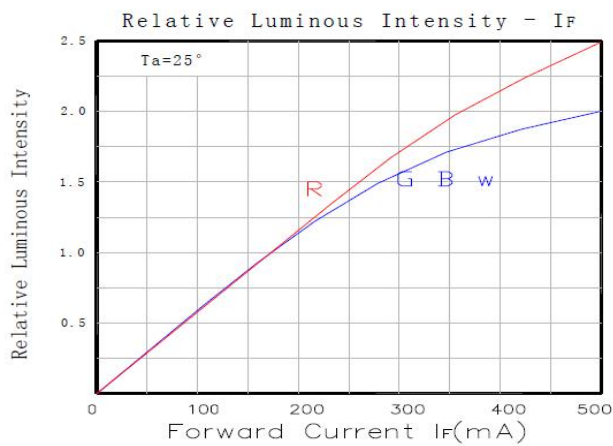

Spec No.: C3535

Issue No.: G-Rev-4

LuckyLight Electronics Co., Ltd

Copyright © 2017 LuckyLight All Rights Reserved

Date: 12-Sep-2017

E-mail: sales@luckylight.cn

http:// www.luckylight.cn


Page: 5 / 9

# C3535RGBWC-001

3.5\*3.5mm, 1W Multi Color LED  
1W Power LED Light Source


## Technical Data Sheet

### Reel Dimensions:

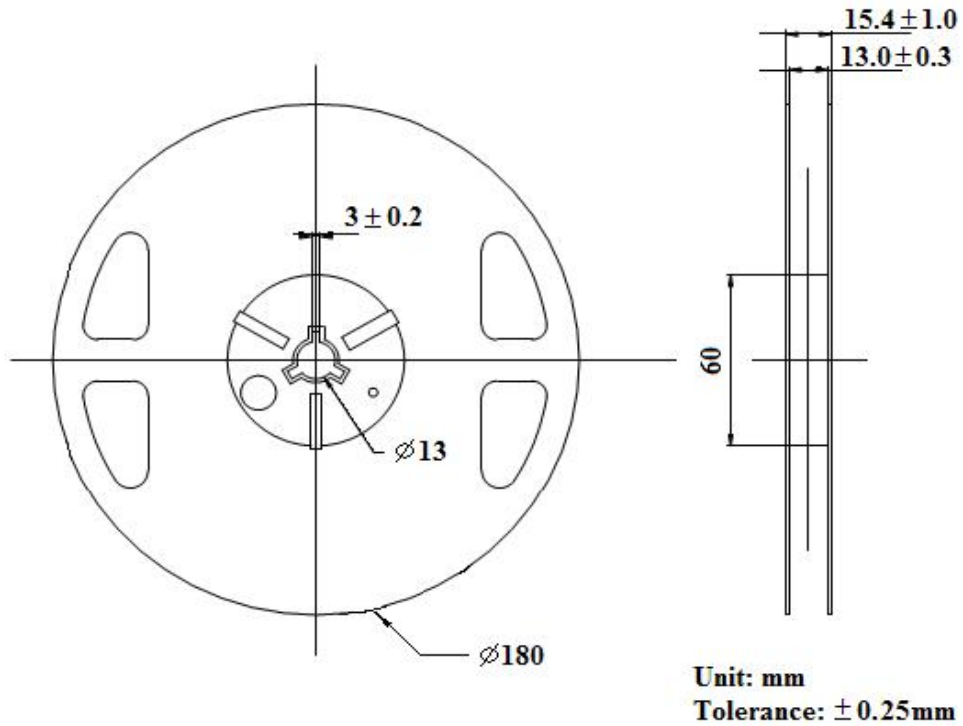

### Carrier Tape Dimensions:

Loaded quantity 1000 pcs per reel.

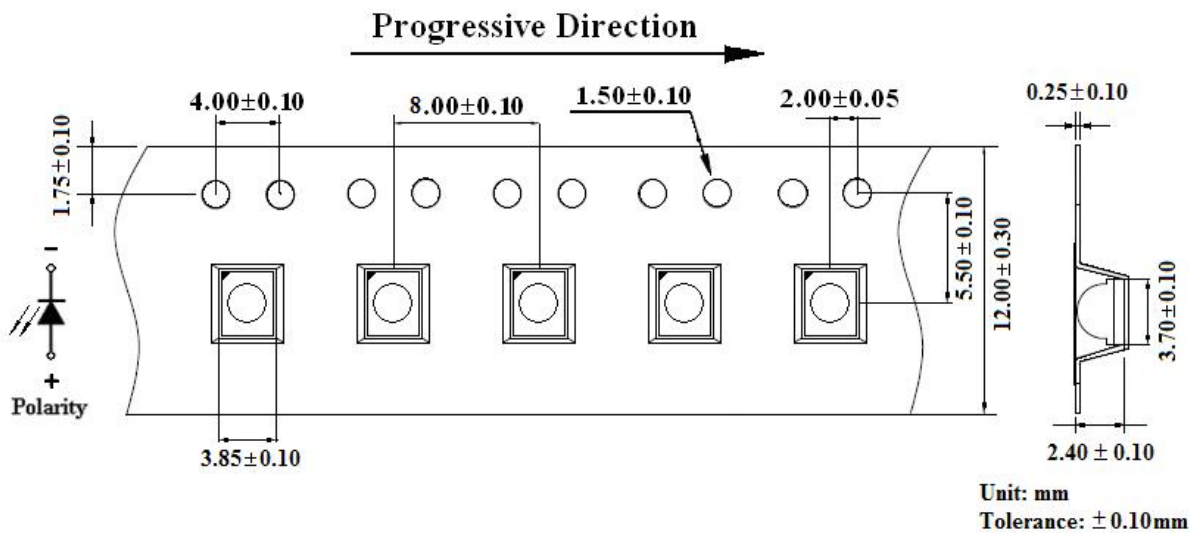

## C3535RGBWC-001

3.5\*3.5mm, 1W Multi Color LED

1W Power LED Light Source


LuckyLight

### Technical Data Sheet

#### CAUTIONS

##### 1. Handling Precautions:

- 1.1. Handle the component along the side surfaces by using forceps or appropriate tools.
- 1.2. Do not directly touch or handle the silicone lens surface. It may damage the internal circuitry.
- 1.3. Do not stack together assembled PCBs containing exposed LEDs. Impact may scratch the silicone lens or damage the internal circuitry.

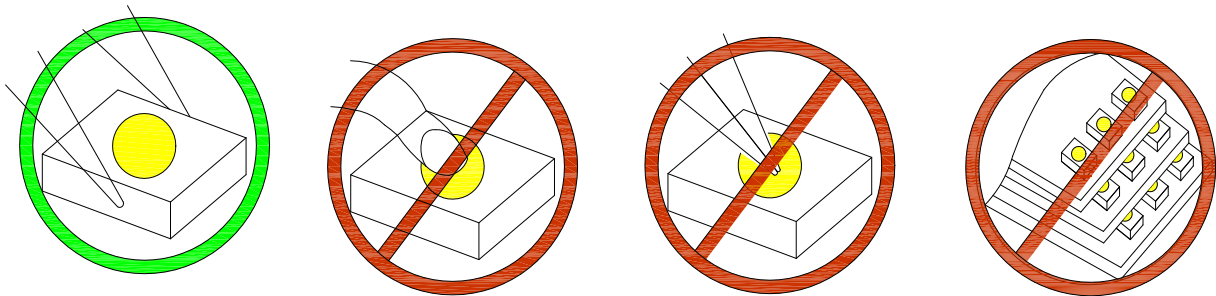

Compare to epoxy encapsulant that is hard and brittle, silicone is softer and flexible. Although its characteristic significantly reduces thermal stress, it is more susceptible to damage by external mechanical force. As a result, special handling precautions need to be observed during assembly using silicone encapsulated LED products. Failure to comply might lead to damage and premature failure of the LED.

##### 2. Storage

- 2.1. Do not open moisture proof bag before the products are ready to use.
- 2.2. Before opening the package, the LEDs should be kept at 30°C or less and 60%RH or less.
- 2.3. The LEDs should be used within a year.
- 2.4. After opening the package, the LEDs should be kept at 30°C or less and 60%RH or less.
- 2.5. The LEDs should be used within 24 hours after opening the package.
- 2.6. If the moisture adsorbent material has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions. Baking treatment: 65±5°C for 24 hours

##### 3. Soldering Condition

Spec No.: C3535

Issue No.: G-Rev-4

LuckyLight Electronics Co., Ltd

Copyright © 2017 LuckyLight All Rights Reserved

Date: 12-Sep-2017

E-mail: sales@luckylight.cn

http:// www.luckylight.cn

Page: 7 / 9


# C3535RGBWC-001

3.5\*3.5mm, 1W Multi Color LED  
1W Power LED Light Source



## Technical Data Sheet

### 3.1. Pb-free solder temperature profile

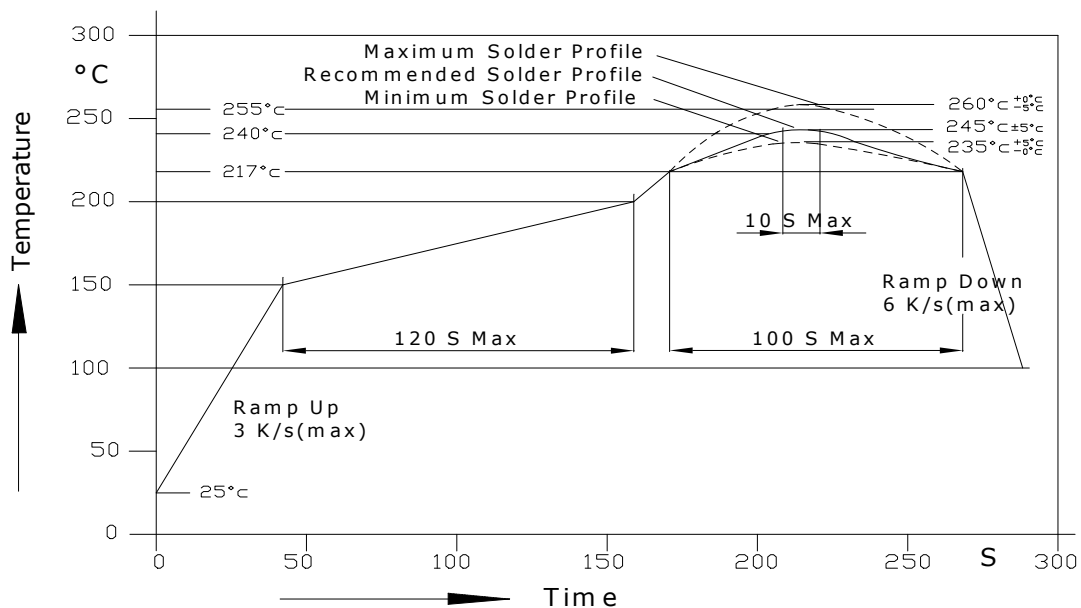

3.2. Reflow soldering should not be done more than two times.

3.3. When soldering, do not put stress on the LEDs during heating.

3.4. After soldering, do not warp the circuit board.

3.5. Recommended soldering conditions:

Reflow soldering		Soldering iron	
Pre-heat	150~200°C	Temperature	300°C Max.
Pre-heat time	120 sec. Max.	Soldering time	3 sec. Max.
Peak temperature	260°C Max.		(one time only)
Soldering time	10 sec. Max.(Max. two times)		

3.6. Because different board designs use different number and types of devices, solder pastes, reflow ovens, and circuit boards, no single temperature profile works for all possible combinations.

However, you can successfully mount your packages to the PCB by following the proper guidelines and PCB-specific characterization.

## 4. Drive Method

Spec No.: C3535

Issue No.: G-Rev-4

LuckyLight Electronics Co., Ltd

Copyright © 2017 LuckyLight All Rights Reserved

Date: 12-Sep-2017

E-mail: sales@luckylight.cn

http:// www.luckylight.cn

Page: 8 / 9



## C3535RGBWC-001

3.5\*3.5mm, 1W Multi Color LED


1W Power LED Light Source

LuckyLight

### Technical Data Sheet

---

4.1. An LED is a current-operated device. In order to ensure intensity uniformity on multiple LEDs connected in parallel in an application, it is recommended that a current limiting resistor be incorporated in the drive circuit, in series with each LED as shown in Circuit A below.

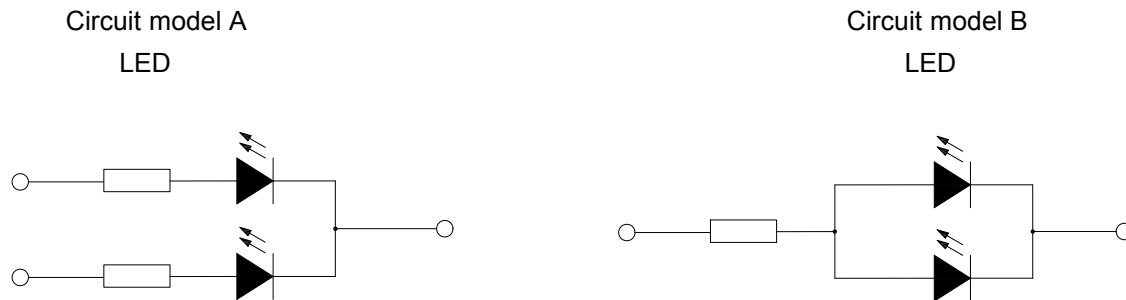

a. Recommended circuit.

b. The brightness of each LED might appear different due to the differences in the I-V characteristics of those LEDs.

#### Terms and conditions for the usage of this document

1. The information included in this document reflects representative usage scenarios and is intended for technical reference only.
2. The part number, type, and specifications mentioned in this document are subject to future change and improvement without notice. Before production usage customer should refer to the latest datasheet for the updated specifications.
3. When using the products referenced in this document, please make sure the product is being operated within the environmental and electrical limits specified in the datasheet. If customer usage exceeds the specified limits, LuckyLight will not be responsible for any subsequent issues.
4. The information in this document applies to typical usage in consumer electronics applications. If customer's application has special reliability requirements or have life-threatening liabilities, such as automotive or medical usage, please consult with LuckyLight representative for further assistance.
5. The contents and information of this document may not be reproduced or re-transmitted without permission by LuckyLight.