

0.31-inch (8.00 mm) 3-Digit Seven-Segment Display
Yellow Green Through-Hole Three-Digit LED Numeric Display

Technical Data Sheet

Features

- High reliability
- Low power consumption
- Mechanically rugged and durable
- Excellent character appearance
- Easy mounting on PC boards or socket
- Stable performance under vibration and shock
- RoHS compliant



Descriptions

KD3-307AGD and KD3-307CGD are three-digit yellow green 7-segment LED displays with a character height of 0.31-inch (8.00 mm). KD3-307AGD adopts a common anode configuration, while KD3-307CGD uses a common cathode configuration. Designed for readability at distances up to approximately 7 meters, these display deliver excellent reliability under bright ambient lighting.

The standard version features green diffused segments on a black surface. An optional version with green diffused segments on a gray surface is also available upon request.


Applications

- **Consumer Electronics:** Home appliances, Game console systems
- **Industrial Equipment:** Instrumentation panels, Panel meters, Test and measurement, Control systems
- **Commercial Terminals:** Point-of-sale terminals
- **General Use:** Digital readout displays

Device Selection Guide

Part No.	Emitting Color	Circuit Type
KD3-307AGD	Yellow Green	Common Anode
KD3-307CGD	Yellow Green	Common Cathode

Package Dimension

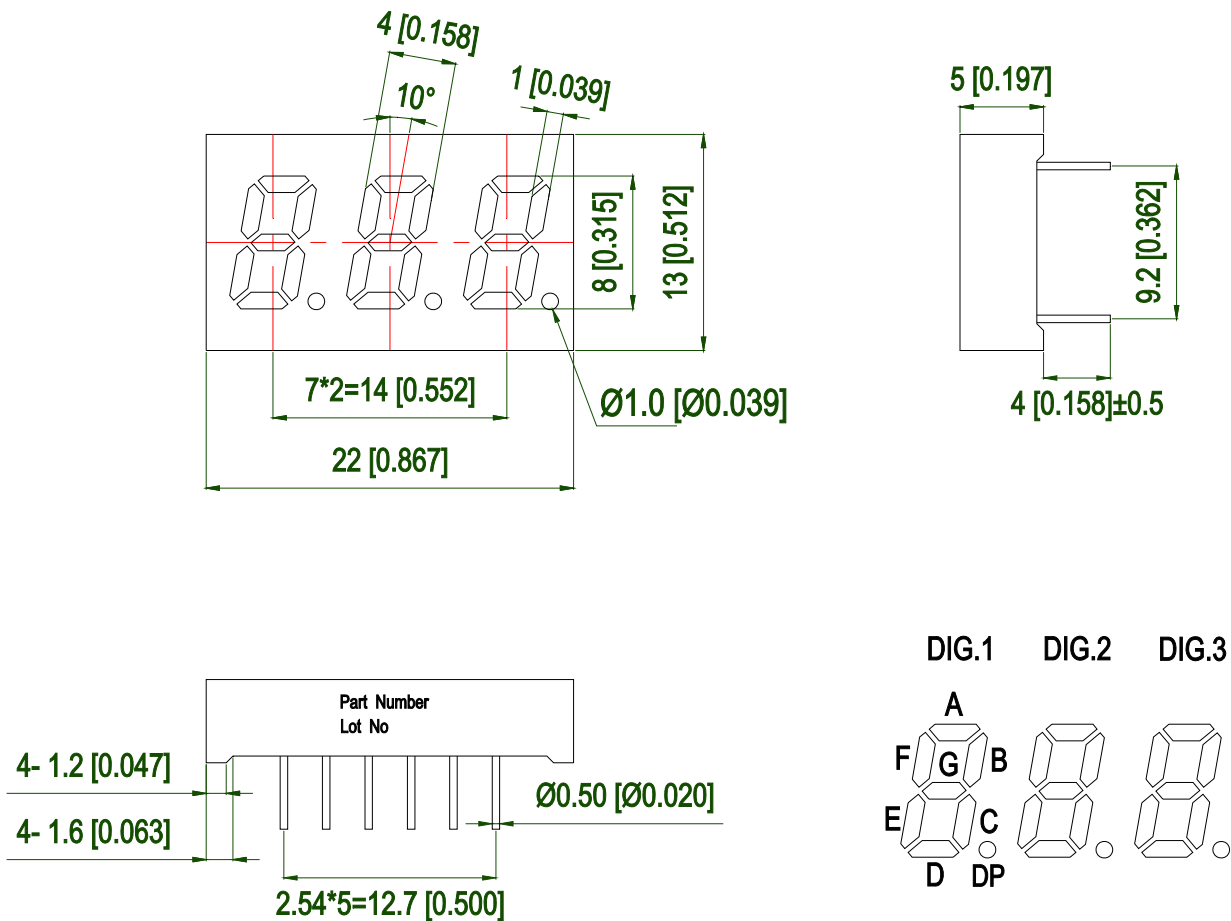


Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25\text{mm}$ (.010") unless otherwise noted.
3. The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.


0.31-inch (8.00 mm) 3-Digit Seven-Segment Display
Yellow Green Through-Hole Three-Digit LED Numeric Display
Technical Data Sheet

Internal Circuit Diagram

KD3-307AGD (Common Anode)

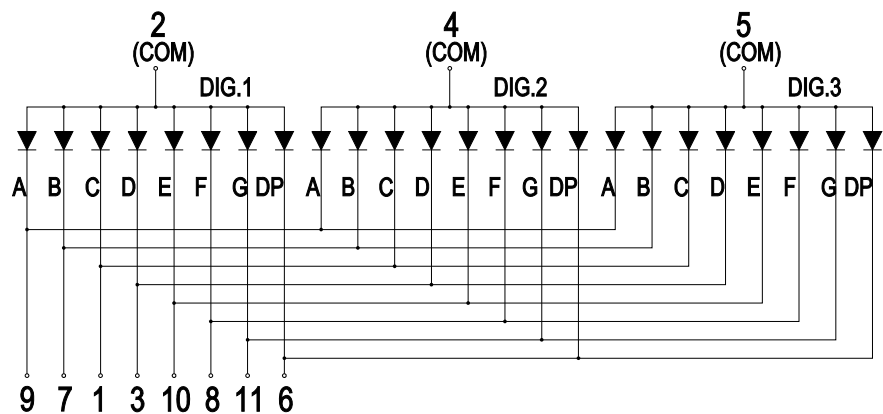


KD3-307CGD (Common Cathode)

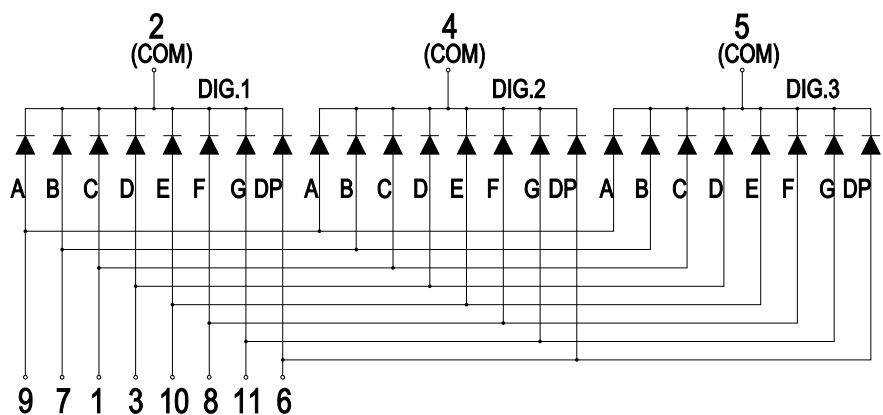


0.31-inch (8.00 mm) 3-Digit Seven-Segment Display
Yellow Green Through-Hole Three-Digit LED Numeric Display
Technical Data Sheet

Pin Connection

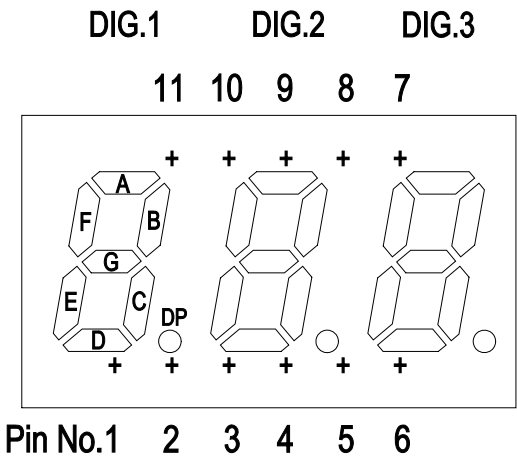

Pin No.	Function
1	Segment C
2	Digit 1 Common
3	Segment D
4	Digit 2 Common
5	Digit 3 Common
6	DP
7	Segment B
8	Segment F
9	Segment A
10	Segment E
11	Segment G

Recommended PCB Layout

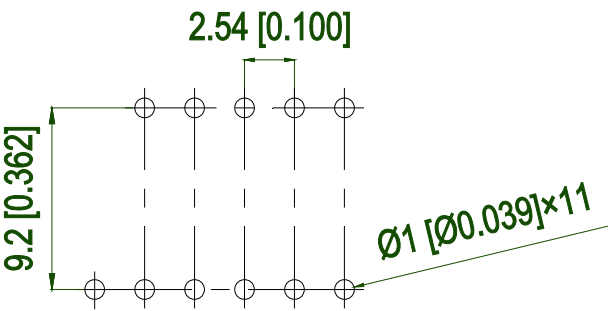

0.31-inch (8.00 mm) 3-Digit Seven-Segment Display
Yellow Green Through-Hole Three-Digit LED Numeric Display

Technical Data Sheet

Absolute Maximum Ratings at T_A=25°C

Parameters	Symbol	Max	Unit
Power Dissipation (Per Chip)	P _D	48	mW
Peak Forward Current (Per Segment) (1/10 Duty Cycle, 0.1ms Pulse Width)	I _{FP}	60	mA
Forward Current (Per Segment)	I _F	20	mA
Reverse Voltage (Per Chip)	V _R	5	V
Operating Temperature Range	T _{opr}	-40°C to +80°C	
Storage Temperature Range	T _{stg}	-40°C to +85°C	

Electrical Optical Characteristics at T_A=25°C

Parameters	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Average Luminous Intensity	I _v	4.0	10.8	---	mcd	IF=10mA (Note a)
Luminous Intensity Matching Ratio	I _{v-m}	---	---	2:1		IF=10mA
Peak Emission Wavelength	λ _p	---	575	---	nm	IF=10mA
Dominant Wavelength	λ _d	---	572	---	nm	IF=10mA (Note b)
Spectral Line Half-Width	Δλ	---	20	---	nm	IF=10mA
Forward Voltage (Per Segment)	V _F	---	1.9	2.4	V	IF=10mA (Note c)
Reverse Current (Per Segment)	I _R	---	---	50	μA	VR=5V

Notes:

- a. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve. Tolerance of Luminous Intensity: ± 10%.
- b. The dominant wavelength (λ_d) is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.
- c. Tolerance of Forward Voltage: ± 0.1V.

0.31-inch (8.00 mm) 3-Digit Seven-Segment Display
Yellow Green Through-Hole Three-Digit LED Numeric Display

Technical Data Sheet





Bin Limits

Light Intensity (mcd) at 10mA		
Bin Code	Min	Max.
C	4.0	6.0
D	6.0	9.0
E	9.0	13.5
F	13.5	20.2
G	20.2	30.3

Tolerance of Luminous Intensity: $\pm 10\%$

0.31-inch (8.00 mm) 3-Digit Seven-Segment Display
Yellow Green Through-Hole Three-Digit LED Numeric Display
Technical Data Sheet

Typical Electrical/Optical Characteristic Curves at $T_A = 25^{\circ}\text{C}$

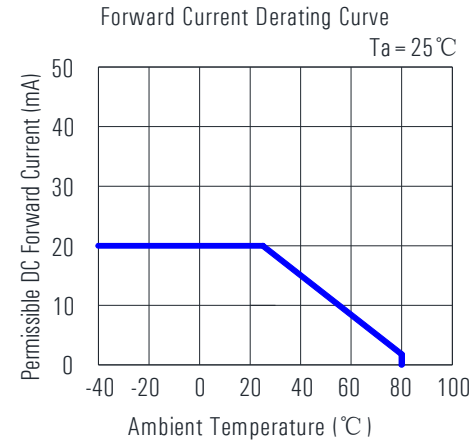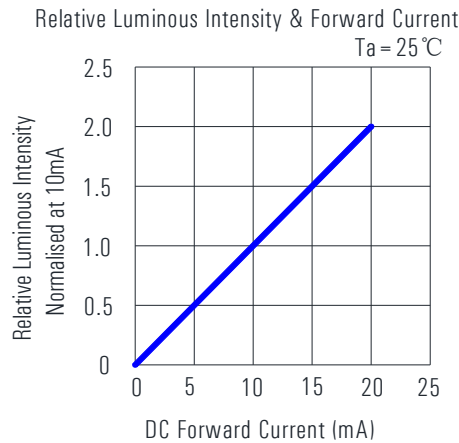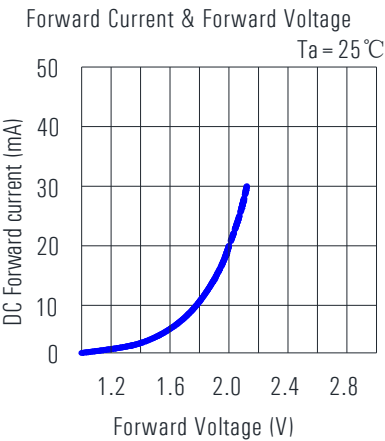
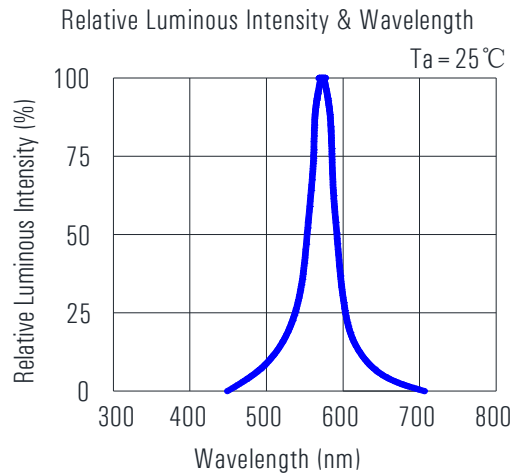


KD3-307AGD / KD3-307CGD

0.31-inch (8.00 mm) 3-Digit Seven-Segment Display
Yellow Green Through-Hole Three-Digit LED Numeric Display

Technical Data Sheet

Packing & Label Specifications

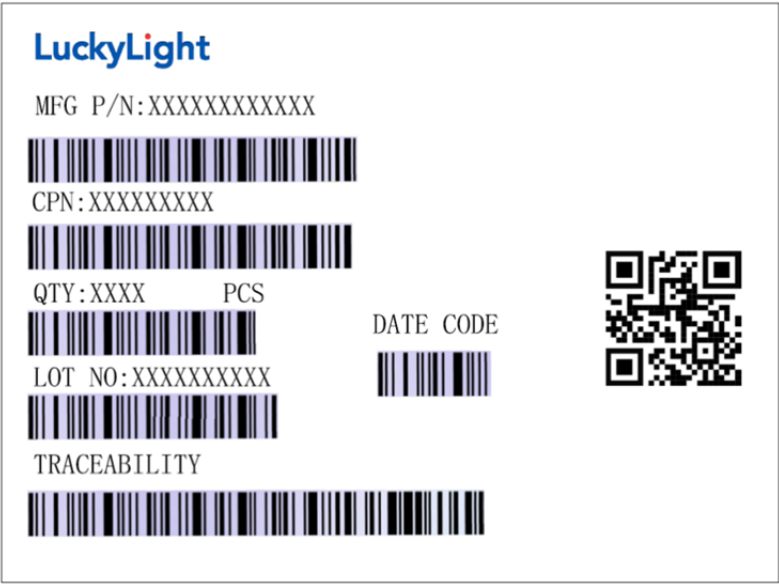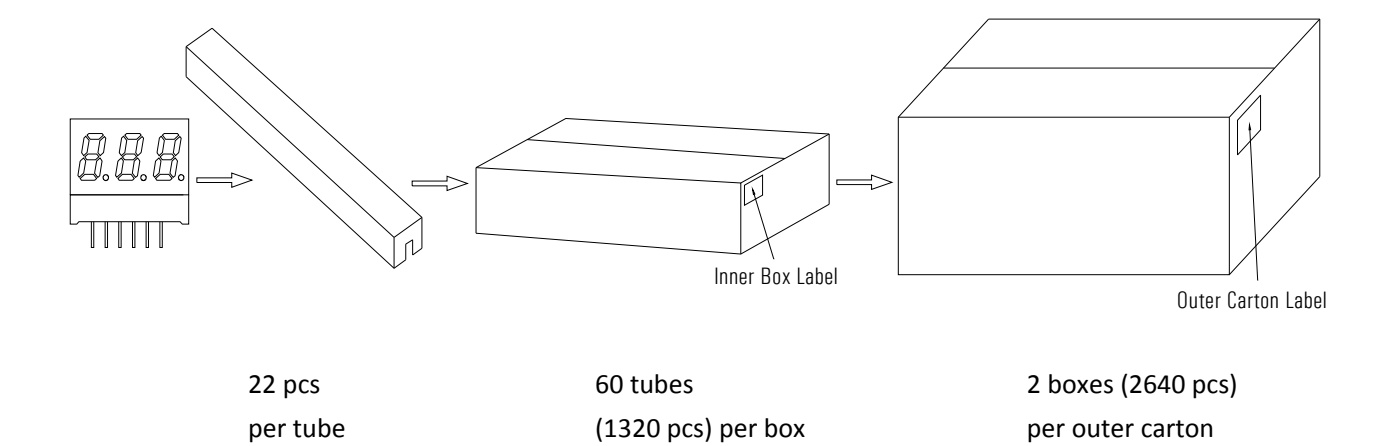

Notes:



1. The above "Packing & Label Specifications" refer to bag packaging and are for reference only.
2. Bag packaging will be used for through-hole LED digital displays with character heights exceeding 0.8 inches.
3. Luckylight through-hole LED digital displays offer three packaging options: tube, bag, and box. If customers have special packaging requirements, please confirm the required packaging method with the salesperson in advance when placing an order.

Precautions

Through Hole Digital Display Mounting Method



1. Lead Forming

- 1.1. Do not bend the component leads by hand without proper tools.
- 1.2. The leads should be bent by clinching the upper part of the lead firmly so that the bending force is not exerted on the plastic body.

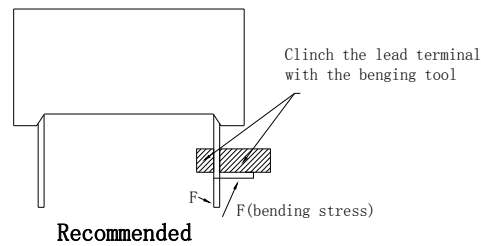
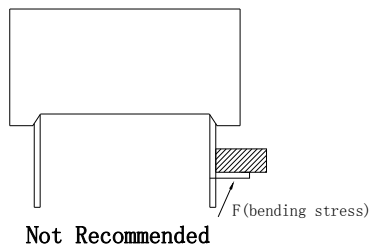


2. Installation

- 2.1. The installation process should not apply stress to the lead terminals.
- 2.2. When inserting for assembly, ensure the terminal pitch matches the substrate board's hole pitch to prevent spreading or pinching of the lead terminals.




- 2.3. The component shall be placed at least 5mm from the edge of the PCB to avoid damage caused by excessive heat during wave soldering.

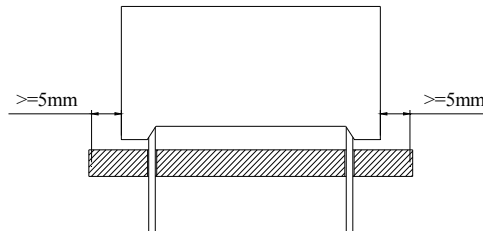

0.31-inch (8.00 mm) 3-Digit Seven-Segment Display
Yellow Green Through-Hole Three-Digit LED Numeric Display
Technical Data Sheet

3.Recommended Wave Soldering Profiles

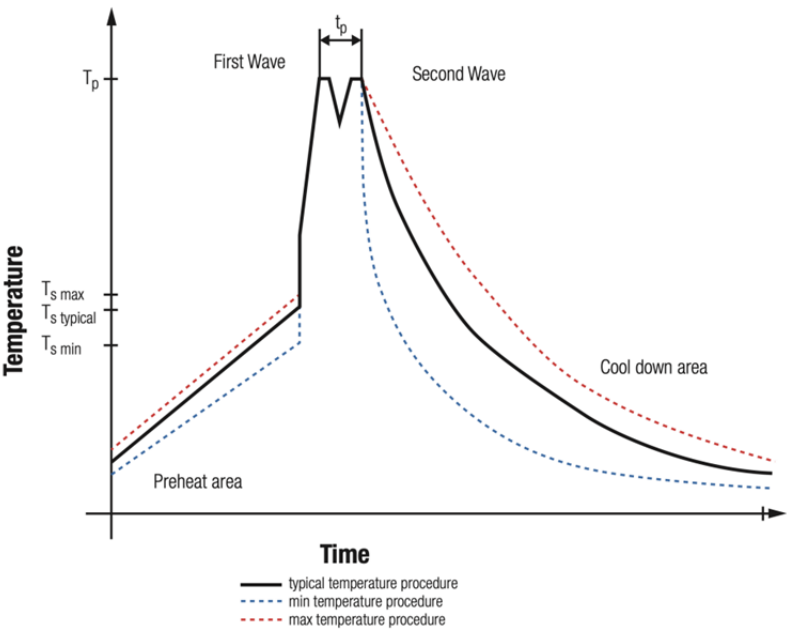

Profile Feature		Pb-Free Assembly
Preheat Temperature Min	$T_{s\ min}$	100 °C
Preheat Temperature Typical	$T_{s\ typical}$	120 °C
Preheat Temperature Max	$T_{s\ max}$	130 °C
Preheat Time t_s from $T_{s\ min}$ to $T_{s\ max}$	t_s	70 seconds
Ramp-up Rate	ΔT	150 °C / max
Peak Temperature	T_p	245°C - 260°C
Time of actual peak temperature	t_p	5-8 seconds max
Ramp-down Rate,Min		~ 2 K / second
Ramp-down Rate, Typical		~ 3.5 K / second
Ramp-down Rate, max		~ 5 K / second
Time 25 °C to 25 °C		4 minutes
Applied cycles		1 cycle max

Refer to EN61760-1:2006

3.1 When reworking or repairing this LED device using manual soldering, the following conditions must be strictly observed:

- Maximum soldering iron tip temperature: 315°C.
- Maximum soldering time: 5 seconds.
- Maximum number of soldering cycles: 1 time.
- Maximum soldering iron power: 50W.

4.Soldering General Notes

- 4.1.Through-hole LED digital displays are not suitable for reflow soldering.
- 4.2. If components will undergo multiple soldering processes or other high-heat treatments, please consult LuckyLight for compatibility.

5.Cleaning



- 5.1.Mild "no-clean" fluxes are recommended for soldering purposes.
- 5.2. If cleaning is necessary, LuckyLight suggests washing components with water only. Avoid using harsh organic solvents for cleaning as they can damage the plastic parts.

0.31-inch (8.00 mm) 3-Digit Seven-Segment Display**Yellow Green Through-Hole Three-Digit LED Numeric Display****Technical Data Sheet**

- 5.3. The cleaning process should occur at room temperature, and the devices should not be washed for more than one minute.
- 5.4. After using water in the cleaning process, promptly remove excess moisture from the component by utilizing forced-air drying.

6.Circuit Design Notes

- 6.1. Protective current-limiting resistors may be necessary to operate the LEDs within the specified range.
- 6.2. LEDs mounted in parallel should each be placed in series with its own current-limiting resistor.

Recommended Set-up**Invalid Set-up**

- 6.3. The driving circuit should be designed to protect the LED against reverse voltages and transient voltage spikes when the circuit is powered up or shut down.
- 6.4. The safe operating current should be selected by taking into account the maximum ambient temperature of the operating environment.
- 6.5. Extended reverse bias should be avoided as it may result in metal migration, leading to an escalation in leakage current or potential short circuits.

7.LED Storage Instructions

- 7.1. Store LEDs at or below 30°C and 80% relative humidity (RH) before opening the package.
- 7.2. LEDs should be used within one year of purchase.
- 7.3. After opening the package, store LEDs at or below 30°C and 60% RH.

Disclaimer**1. Product Material and Specification Adjustment Rights:**

LuckyLight reserves the right to update product materials or specifications to improve reliability, functionality, design, or for other valid reasons.

2. Description of Data in Datasheets:

The data presented in this datasheet represents typical values and does not constitute guaranteed figures. The data provided is for reference purposes only.

3. Compliance with Usage Instructions:

When using this product, please strictly adhere to the absolute maximum ratings and instructions outlined in the specification sheets. LuckyLight shall not be held responsible for any damage resulting from non-compliance with these instructions.

4. Application Limitations:

This product is not intended for applications in military, aviation, automotive, medical, life-sustaining, or life-saving fields where failure could cause personal injury or death. For specific application requirements, please consult an authorized LuckyLight sales representative.

5. Disclaimer:

LuckyLight strives for accuracy in its datasheets, specifications, and disclosures. However, we cannot be held liable for any errors or omissions. Product suitability for specific applications is the customer's responsibility.

6. Limitation of Liability:

LuckyLight's liability is limited to the cost of the product. We are not liable for any damages arising from product application, continued production, or any product usage.

0.31-inch (8.00 mm) 3-Digit Seven-Segment Display
Yellow Green Through-Hole Three-Digit LED Numeric Display

Technical Data Sheet

Revision History

Revision	Date	Contents	Page
Rev. 1	March 25, 2024	Original Version	/