2.8x0.8mm,Cool White LED Side View PLCC-2 LED Indicator

## **Technical Data Sheet**

#### Features:

- Side view type
- PLCC-2 package.
- White package.
- Inter reflector.
- Wide viewing angle.
- Suitable for automatic placement equipment.
- Suitable for vapor-phase reflow, Infrared reflow and wave solder processes.
- Available on tape and reel (12mm Tape).
- The product itself will remain within RoHS compliant Version.

#### **Descriptions:**

• The V213 SMD LED is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.

Luckylight

- Utilizing advanced AlGaInP chip technology.
- Besides, lightweight makes them ideal for miniature applications, etc.

#### **Applications:**

- Indicator and backlight in office and family equipment.
- Flat backlight for LCD's, switches and symbols.
- Light pipe application.
- LCD Back Light.
- General use.

Spec No.: V213	Date:	22-Mar-2017
Issue No.: G-Rev-4	E-mail:	sales@luckylight.cn
Luckylight Electronics Co., Ltd	http://	www.luckylight.cn
Copyright © 2017 Luckylight All Rights Reserved	Page:	1 / 11


2.8x0.8mm,Cool White LED Side View PLCC-2 LED Indicator

### **Technical Data Sheet**

Luc	kyl	ight
		- 3

Part No.	Emitting Color	Lens Color
V213W-W2-1C-M	Cool White	Yellow Diffused


#### Package Dimension:




Top View




Polarity



Side View



#### **Recommended Soldering Pad Dimensions**



#### Notes:

1. All dimensions are in millimeters (inches).

2. Tolerance is  $\pm$  0.25 mm (.010") unless otherwise noted.

Spec No.:	V213	Date:	22-Mar-2017
Issue No.:	G-Rev-4	E-mail:	sales@luckylight.cn
Luckylight E	Electronics Co., Ltd	http://	www.luckylight.cn
Copyright @	2017 Luckylight All Rights Reserved	Page:	2 / 11

2.8x0.8mm,Cool White LED Side View PLCC-2 LED Indicator

# Luckylight

#### **Technical Data Sheet**

#### Absolute Maximum Ratings at Ta=25℃

Symbol	Max	Unit
Pd	90	mW
IFP	100	mA
IF	25	mA
VR	5	V
ESD	1000	V
Topr	-40℃ to +80℃	
Tstg	-40℃ to +85℃	
Tsld	260 $^\circ\!\!\!\mathrm{C}$ for 5 Seconds	
	Pd IFP IF VR ESD Topr Tstg	Pd 90   IFP 100   IF 25   VR 5   ESD 1000   Topr -40°C to +80   Tstg -40°C to +85

#### Notes:

a. Derate linearly as shown in derating curve.

b. Duty Factor = 10%, Frequency = 1 kHz

# Electrical Optical Characteristics at Ta=25°C

Parameters	Symbol	Min.	Тур.	Max.	Unit	Test Condition
Luminous Intensity <sup>(a)</sup>	IV	1200	1600		mcd	IF=20mA
Viewing Angle <sup>(b)</sup>	201/2		120		Deg	IF=20mA
	х		0.285			IE-00 A
Chromaticity Coordinates <sup>(C)</sup>	у		0.310			IF=20mA
Forward Voltage	VF	2.60	3.20	3.60	V	IF=20mA
Reverse Current	IR			10	μA	V <sub>R</sub> =5V

#### Notes:

a. ALuminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.

b. 201/2 is the o -axis angle where the luminous intensity is 1/2 the peak intensity

c. The dominant wavelength ( $\lambda d$ ) is derived from the CIE chromaticity diagram and represents the single wavelength which

#### defines the color of the device.


Spec No.: V213	Date:	22-Mar-2017
Issue No.: G-Rev-4	E-mail:	sales@luckylight.cn
Luckylight Electronics Co., Ltd	http://	www.luckylight.cn
Copyright © 2017 Luckylight All Rights Reserved	Page:	3 / 11

2.8x0.8mm,Cool White LED Side View PLCC-2 LED Indicator


# Luckylight


### **Technical Data Sheet**

# Typical Electrical / Optical Characteristics Curves (25℃ Ambient Temperature Unless Otherwise Noted)

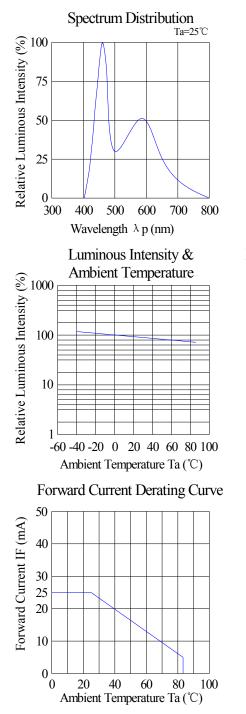

Luminous Intensity & Forward Current





Spec No.: V213 Issue No.: G-Rev-4 Luckylight Electronics Co., Ltd Copyright © 2017 Luckylight All Rights Reserved

Date:	22-Mar-2017
-mail:	sales@luckylight.cn
http://	www.luckylight.cn
Page:	4 / 11


E



2.8x0.8mm,Cool White LED Side View PLCC-2 LED Indicator

### **Technical Data Sheet**

### **CIE 1931 Chromaticity Diagram:**

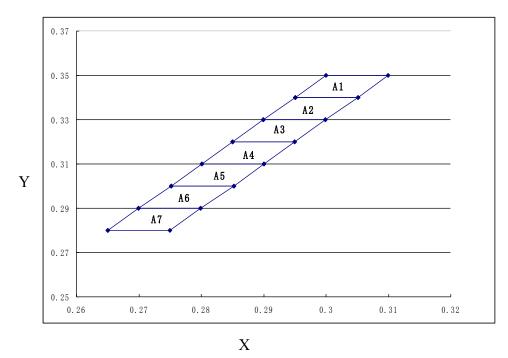

#### Chromaticity Coordinates Specifications for Bin Rank:

Bin Code	CIE-X	CIE-Y	CIE-X	CIE-Y	CIE-X	CIE-Y	CIE-X	CIE-Y
A1	0.2951	0.3400	0.3000	0.3500	0.3100	0.3500	0.3051	0.3400
A2	0.2899	0.3300	0.2951	0.3400	0.3051	0.3400	0.2999	0.3300
A3	0.2850	0.3200	0.2899	0.3300	0.2999	0.3300	0.2950	0.3200
A4	0.2801	0.3100	0.2850	0.3200	0.2950	0.3200	0.2901	0.3100
A5	0.2752	0.3000	0.2801	0.3100	0.2901	0.3100	0.2852	0.3000
A6	0.2699	0.2900	0.2752	0.3000	0.2852	0.3000	0.2799	0.2900
A7	0.2650	0.2800	0.2699	0.2900	0.2799	0.2900	0.2750	0.2800

#### Notes:

1. Color coordinates measurement allowance is  $\pm$  0.15.

2. One delivery will include up to two consecutive color ranks and three luminous intensity ranks of the products the quantity-ratio of the ranks is decided by *Luckylight*.

Spec No.: V213


Issue No.: G-Rev-4

Luckylight Electronics Co., Ltd Copyright © 2017 Luckylight All Rights Reserved Date: 22-Mar-2017 E-mail: sales@luckylight.cn http:// www.luckylight.cn Page: **5 / 11** 

2.8x0.8mm,Cool White LED Side View PLCC-2 LED Indicator

### **Technical Data Sheet**


**Reel Dimensions:** 

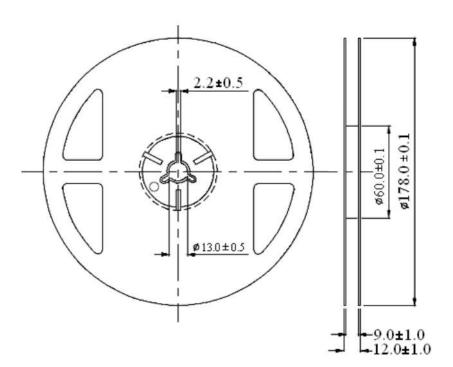

Unit: mm Tolerance: ±0.25mm

#### **Carrier Tape Dimensions:**

Loaded quantity 3000 pcs per reel.

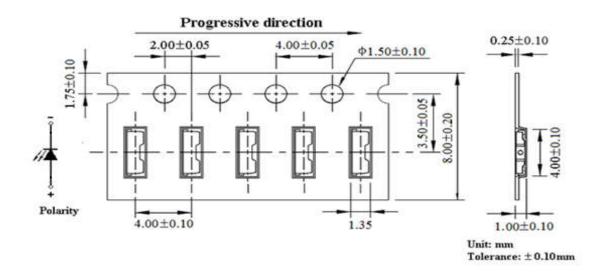

Spec No.: V213 Issue No.: G-Rev-4 Luckylight Electronics Co., Ltd Copyright © 2017 Luckylight All Rights Reserved Date: 22-Mar-2017 E-mail: sales@luckylight.cn http:// www.luckylight.cn Page: 6 / 11


# Luckylight

2.8x0.8mm,Cool White LED Side View PLCC-2 LED Indicator

# **Technical Data Sheet**

# Packing & Label Specifications:

Moisture Resistant Packaging:

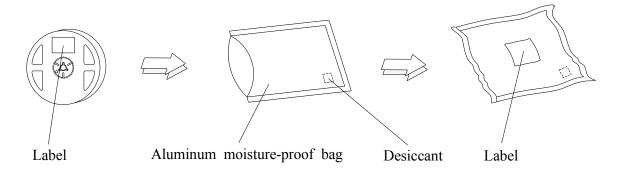

Label Outside Box Side 285 (410) Part No.: PO No.: F Q C XX XX XX PASS XXXXXX Lot No .: 7 RoHS Quantity: XXXX PCS Bin Code: XXXX Label Outside Label Date 475 (465)

Spec No.: V213	Date:	22-Mar-2017
Issue No.: G-Rev-4	E-mail:	sales@luckylight.cn
Luckylight Electronics Co., Ltd	http://	www.luckylight.cn
Copyright © 2017 Luckylight All Rights Reserved	Page:	7 / 11



2.8x0.8mm,Cool White LED Side View PLCC-2 LED Indicator

# **Technical Data Sheet**


# CAUTIONS

#### 1. Handling Precautions:

1.1 Handle the component along the side surfaces by using forceps or appropriate tools.

1.2 Do not directly touch or handle the silicone lens surface. It may damage the internal circuitry.

1.3 Do not stack together assembled PCBs containing exposed LEDs. Impact may scratch the silicone lens or damage the internal circuitry.

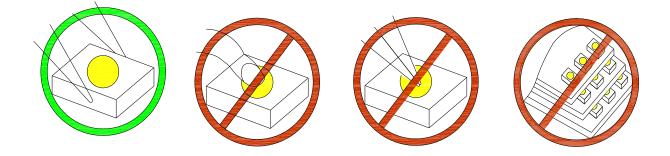

1.4 Compare to epoxy encapsulant that is hard and brittle, silicone is softer and flexible. Although its characteristic significantly reduces thermal stress, it is more susceptible to damage by external mechanical force. As a result, special handling precautions need to be observed during assembly using silicone encapsulated LED products. Failure to comply might lead to damage and premature failure of the LED.

#### 2. Storage:

2.1 Do not open moisture proof bag before the products are ready to use.

- 2.2 Before opening the package, the LEDs should be kept at 30°C or less and 60%RH or less.
- 2.3 The LEDs should be used within a year.
- 2.4 After opening the package, the LEDs should be kept at 30°C or less and 60%RH or less.
- 2.5 The LEDs should be used within 24 hours after opening the package.

2.6 If the moisture adsorbent material has fabled away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions. Baking treatment: 65±5°C for 24 hours.


Luckylight

2.8x0.8mm,Cool White LED Side View PLCC-2 LED Indicator

# **Technical Data Sheet**

#### 3. Soldering Condition:

3.1 Pb-free solder temperature profile.

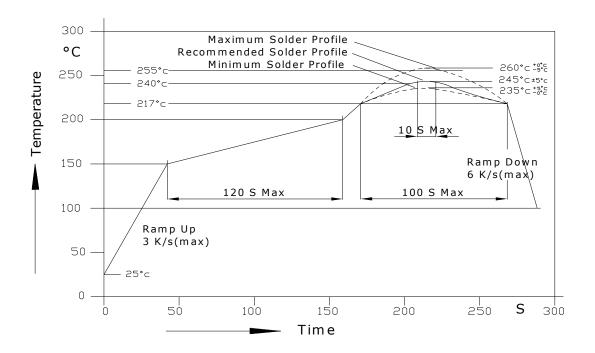

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.
- 3.5 Recommended soldering conditions:

Refl	ow soldering	Soldering iron		
Pre-heat	150~200°C	Temperature	300°C Max.	
Pre-heat time	120 sec. Max.	Soldering time	3 sec. Max.	
Peak temperature	260°C Max.		(one time only)	
Soldering time 10 sec. Max. (Max. two times)				

3.6 Because different board designs use different number and types of devices, solder pastes, reflow ovens, and circuit boards, no single temperature profile works for all possible combinations.

However, you can successfully mount your packages to the PCB by following the proper guidelines and PCB-specific characterization.




2.8x0.8mm,Cool White LED Side View PLCC-2 LED Indicator

## **Technical Data Sheet**

#### 4. Drive Method:

4.1 An LED is a current-operated device. In order to ensure intensity uniformity on multiple LEDs connected in parallel in an application, it is recommended that a current limiting resistor be incorporated in the drive circuit, in series with each LED as shown in Circuit A below.

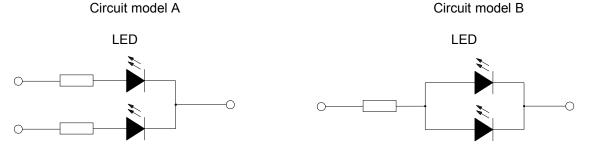

(A) Recommended circuit.

(B) The brightness of each LED might appear different due to the differences in the I-V characteristics of those LEDs.

#### 5. ESD (Electrostatic Discharge):

Static Electricity or power surge will damage the LED. Suggestions to prevent ESD damage:

- Use of a conductive wrist band or anti-electrostatic glove when handling these LEDs.
- All devices, equipment, and machinery must be properly grounded.
- Work tables, storage racks, etc. should be properly grounded.
- Use ion blower to neutralize the static charge which might have built up on surface of the LED's plastic lens as a result of friction between LEDs during storage and handling.

ESD-damaged LEDs will exhibit abnormal characteristics such as high reverse leakage current, low forward voltage, or "no lightup" at low currents. To verify for ESD damage, check for "lightup" and Vf of the suspect LEDs at low currents. The Vf of "good" LEDs should be >2.0V@0.1mA for InGaN product and >1.4V@0.1mA for AlInGaP product.



2.8x0.8mm,Cool White LED Side View PLCC-2 LED Indicator

# Luckylight

### **Technical Data Sheet**

#### Terms and conditions for the usage of this document:

1. The information included in this document reflects representative usage scenarios and is intended for technical reference only.

2. The part number, type, and specifications mentioned in this document are subject to future change and improvement without notice. Before production usage customer should refer to the latest datasheet for the updated specifications.

3. When using the products referenced in this document, please make sure the product is being operated within the environmental and electrical limits specified in the datasheet. If customer usage exceeds the specified limits, Luckylight will not be responsible for any subsequent issues.

4. The information in this document applies to typical usage in consumer electronics applications. If customer's application has special reliability requirements or have life-threatening liabilities, such as automotive or medical usage, please consult with Luckylight representative for further assistance.

5. The contents and information of this document may not be reproduced or re-transmitted without permission by Luckylight.

Date:	22-Mar-2017
E-mail:	sales@luckylight.cn
http://	www.luckylight.cn
Page:	11 / 11
	E-mail: http://