

**GI-P10R**

P10 DIP Red LED Scrolling Message Displays  
Indoor LED Displays

**Technical Specifications****LED Pixel Configuration**

Sn.	Item	Type
1	Pixel Composition	1R
2	LED Encapsulation	DIP645

**LED Screen Body Parameters**

Sn.	Item	Value
1	Pixel Pitch	10mm
2	Drive Mode	1/4 Scan
3	Module Resolution	32×16pixel
4	Module Size	320×160mm
5	Cabinet Size	1050×410mm
6	8Cabinet Resolution	96×96pixel
7	Pixel Density	10,000pixels/m <sup>2</sup>
8	Cabinet Material	Steel
9	Brightness	>500~800cd/m <sup>2</sup>
10	Viewing Angle	H:35° V:20°
11	Optimum Viewing Distance	≥8m
12	Refresh Rate	≥400
13	Input Voltage	AC100-220V
14	Power Consumption(Max./Ave.)	350W/300W/m <sup>2</sup>
15	Screen Weight	30kg
16	MTBF	10,000hours
17	Lifespan	100,000hours
18	IP Grade	IP65
19	Working Temperature	-20 -60°C

## GI-P10R

P10 DIP Red LED Scrolling Message Displays  
Indoor LED Displays


LuckyLight

## Technical Specifications

---

20	Working Humidity	10%-90%
21	Control System	Normal System

## Pictures

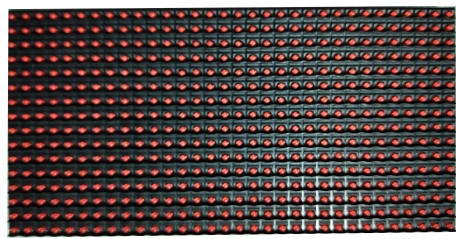

Front view



Back view

## Cases

