


MI-P10RGB3216-8S-CC

P10 SMD Full Color LED Display Modules
Indoor LED Displays



Technical Specifications

LED Lamp Parameters

Picture	Color	Brightness(mcd)	Wavelength(nm)	Test Condition@25°C
	Red	180~220	625~630	IF=20mA
	Green	650~750	520~525	IF=15mA
	Blue	90~110	465~470	IF=10mA

LED Pixel Configuration

Sn.	Item	Type
1	Pixel Composition	1R1G1B
2	LED Packaging	SMD3528

LED Screen Body Parameters

Sn.	Item	Value
1	Pixel Pitch	6mm
2	Drive Mode	1/8 Scan
3	Drive IC	MBI5124
4	Module Resolution	32×16dots
5	Module dot Quantity	512 dots
6	Module Size (L*H)	320mm*160 mm
7	Cabinet Size(L*H)	960mm*960mm
8	Cabinet Resolution	96*96 dots
9	Pixel Density	10,000 dots/m ²
10	Cabinet Material	Steel
11	Brightness	1500~1800cd/m2

MI-P10RGB3216-8S-CC


P10 SMD Full Color LED Display Modules
Indoor LED Displays

Luckylight

Technical Specifications

12	ViewingAngle	H140°,V140°
13	MinimumViewingDistance	≥10M
14	GrayLevel	16bit
15	ColorQuantity	281Trillion
16	RefreshRate	≥1920Hz
17	FrameRate	60fps
18	InputVoltage	AC220V/50HzorAC110V/60Hz
19	PowerConsumption(Max/Avg)	282/112W/m2
20	CabinetWeight	35KG
21	MTBF	>10,000H
22	LifeSpan	≥100,000H
23	IPGrade	IP43
24	Temperature	-20°C ~ 60°C
25	Humidity	10% ~ 90%
26	ControlSystem	Customized
27	InterfaceDefinition	HUB75

Pictures

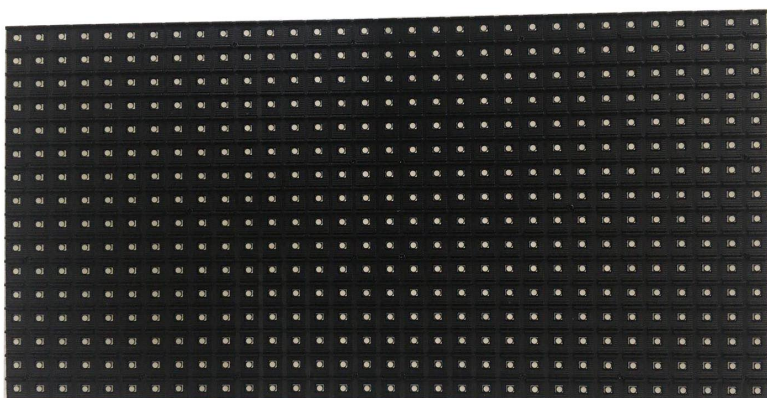

Front view



Back view

MI-P10RGB3216-8S-CC

P10 SMD Full Color LED Display Modules
Indoor LED Displays



Technical Specifications

Cases

