


MI-P2D5RGB6464-32S-AA

P2D5 SMD Full Color LED Display Modules
Indoor LED Displays

Luckylight

Technical Specifications

LED Lamp Parameters

Picture	Color	Brightness(mcd)	Wavelength(nm)	Test Condition@25°C
	Red	160~300	625~630	IF=20mA
	Green	450~600	520~525	IF=10mA
	Blue	140~250	465~470	IF=5mA

LED Pixel Configuration

Sn.	Item	Type
1	Pixel Composition	1R1G1B
2	LED Packaging	SMD2020

LED Screen Body Parameters

Sn.	Item	Value
1	Pixel Pitch	2.5mm
2	Drive Mode	1/32 Scan
3	Drive IC	MBI5124
4	Module Resolution	64×64dots
5	Module dot Quantity	4096 dots
6	Module Size (L*H)	160mm*160 mm
7	Cabinet Size(L*H)	480mm*480mm
8	Cabinet Resolution	192*192 dots
9	Pixel Density	160,000 dots/m ²
10	Cabinet Material	Die-Casting Aluminum
11	Brightness	1000~1400cd/m ²

MI-P2D5RGB6464-32S-AA


P2D5 SMD Full Color LED Display Modules
Indoor LED Displays

LuckyLight


Technical Specifications

12	ViewingAngle	H140°,V140°
13	MinimumViewingDistance	≥2.5M
14	GrayLevel	16bit
15	ColorQuantity	281Trillion
16	RefreshRate	≥2880Hz
17	FrameRate	60fps
18	InputVoltage	AC220V/50HzorAC110V/60Hz
19	PowerConsumption(Max/Avg)	950/380W/m2
20	CabinetWeight	7.5KG
21	MTBF	>10,000H
22	LifeSpan	≥100,000H
23	IPGrade	IP31
24	Temperature	-20°C ~ 60°C
25	Humidity	10% ~ 90%
26	ControlSystem	Customized
27	InterfaceDefinition	HUB75

Pictures

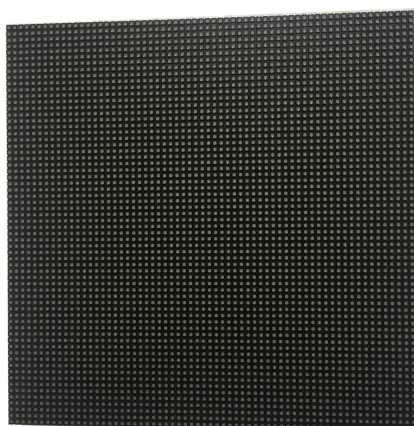

Front view

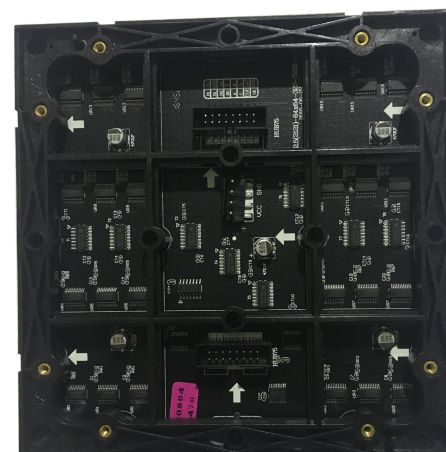

Back view

MI-P2D5RGB6464-32S-AA

P2D5 SMD Full Color LED Display Modules
Indoor LED Displays



Technical Specifications

Cases

