


MI-P6RGB3232-16S-AA

P6 SMD Full Color LED Display Modules
Indoor LED Displays



Technical Specifications

LED Lamp Parameters

Picture	Color	Brightness(mcd)	Wavelength(nm)	Test Condition@25°C
	Red	180~220	625~630	IF=20mA
	Green	650~750	520~525	IF=15mA
	Blue	90~110	465~470	IF=10mA

LED Pixel Configuration

Sn.	Item	Type
1	Pixel Composition	1R1G1B
2	LED Packaging	SMD3528

LED Screen Body Parameters

Sn.	Item	Value
1	Pixel Pitch	6mm
2	Drive Mode	1/16 Scan
3	Drive IC	MBI5124
4	Module Resolution	32×32dots
5	Module dot Quantity	1024 dots
6	Module Size (L*H)	192mm*192 mm
7	Cabinet Size(L*H)	768mm*768mm
8	Cabinet Resolution	128*128 dots
9	Pixel Density	27,777 dots/m²
10	Cabinet Material	Steel
11	Brightness	1300~1500cd/m2

MI-P6RGB3232-16S-AA


P6 SMD Full Color LED Display Modules
Indoor LED Displays



Technical Specifications

12	ViewingAngle	H140°,V140°
13	MinimumViewingDistance	≥6M
14	GrayLevel	16bit
15	ColorQuantity	281Trillion
16	RefreshRate	≥2080Hz
17	FrameRate	60fps
18	InputVoltage	AC220V/50HzorAC110V/60Hz
19	PowerConsumption(Max/Avg)	391/155W/m2
20	CabinetWeight	35KG
21	MTBF	>10,000H
22	LifeSpan	≥100,000H
23	IPGrade	IP43
24	Temperature	-20℃～60℃
25	Humidity	10%～90%
26	ControlSystem	Customized
27	InterfaceDefinition	HUB75

Pictures

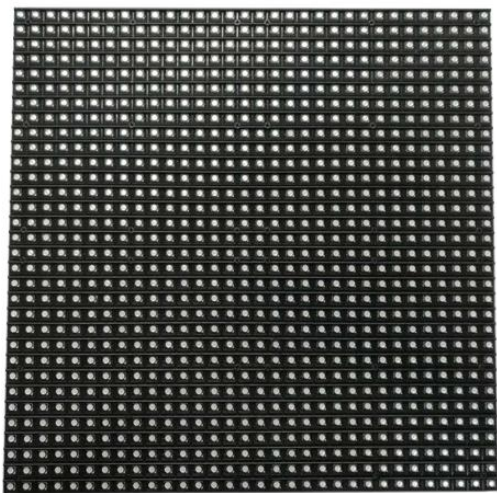

Front view



Back view

MI-P6RGB3232-16S-AA

P6 SMD Full Color LED Display Modules
Indoor LED Displays



Technical Specifications

Cases

