


MO-P6RGB3232-8S-AA

P6 SMD Full Color LED Display Modules
Outdoor LED Displays



Technical Specifications

LED Lamp Parameters

Picture	Color	Brightness(mcd)	Wavelength(nm)	Test Condition@25°C
	Red	600~700	620~625	IF=20mA
	Green	1400~1600	520~525	IF=20mA
	Blue	300~400	465~470	IF=20mA

LED Pixel Configuration

Sn.	Item	Type
1	Pixel Composition	1R1G1B
2	LED Packaging	SMD3535

LED Screen Body Parameters

Sn.	Item	Value
1	Pixel Pitch	6mm
2	Drive Mode	1/8 scan
3	Drive IC	MBI5124
4	Module Resolution	32×32dots
5	Module dot Quantity	1024 dots
6	Module Size (L*H)	192mm*192mm
7	Cabinet Size(L*H)	576mm*576mm
8	Cabinet Resolution	96*96 dots
9	Pixel Density	27,777 dots/m ²
10	Cabinet Material	Die-Casting Aluminum
11	Brightness	>6500cd/m ²

MO-P6RGB3232-8S-AA


P6 SMD Full Color LED Display Modules
Outdoor LED Displays

LuckyLight


Technical Specifications

12	ViewingAngle	H140°,V140°
13	MinimumViewingDistance	≥6M
14	GrayLevel	16bit
15	ColorQuantity	281Trillion
16	RefreshRate	≥3080Hz
17	FrameRate	60fps
18	InputVoltage	AC220V/50HzorAC110V/60Hz
19	PowerConsumption(Max/Avg)	900/270W/m ²
20	Screen Body	35kg/m ²
21	MTBF	>10,000H
22	LifeSpan	≥100,000H
23	IPGrade	IP65
24	Temperature	-20°C ~ 60°C
25	Humidity	10% ~ 90%
26	ControlSystem	Customized
27	InterfaceDefinition	HUB75

Pictures

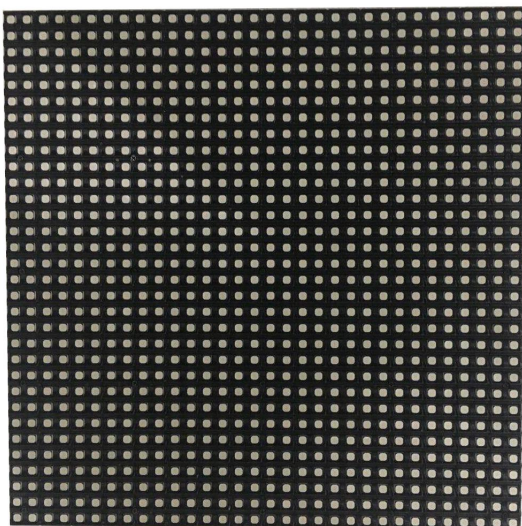

Front view

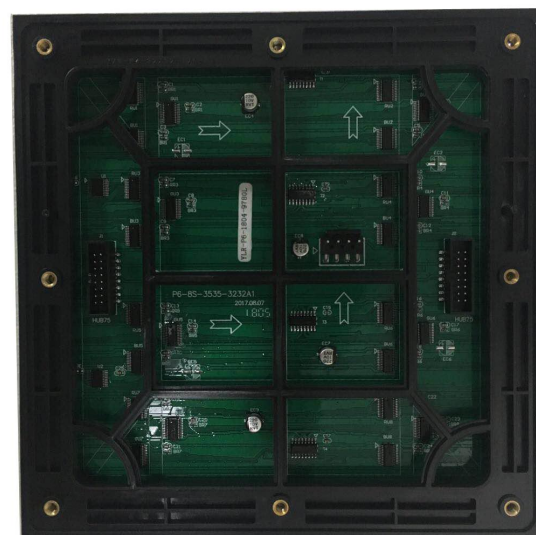

Back view

MO-P6RGB3232-8S-AA

P6 SMD Full Color LED Display Modules
Outdoor LED Displays

LuckyLight

Technical Specifications

Cases

