

0.28inch (7.0mm), Red Triple Digit 7-segment SMD LED Display

# **Technical Data Sheet**

#### **Features**

- 0.28inch (7.00mm) digit height.
- The thickness is thinness than tradition display.
- Packaged in tape and reel for SMT manufacturing.
- Low current operation.
- Excellent characters appearance.
- Categorized for luminous intensity.
- Available in CA and CC.
- The product itself will remain within RoHS compliant Version.



# **Descriptions**

- The KW3-S282AVA / KW3-S282CVA is a 0.28inch (7.00mm) height triple digit display.
- The display provides excellent reliability in bright ambient light.
- The device is made with white segments and gray surface.

### **Applications**

- Home appliances
- Game machine
- Instrument panels
- Digital readout displays

### **Device Selection Guide**

Part No.	Emitting Color	Polarity
KW3-S282AVA	Red	Common Anode
KW3-S282CVA	Red	Common Cathode

Spec No.:S282-Y024Date:16-Mar-2018Issue No.:G-001-Rev-3E-mail:sales@luckylight.cnLuckylight Electronics Co., Ltdhttp://www.luckylight.cn


Copyright © 2017 Luckylight All Rights Reserved Page: 1 / 8



0.28inch (7.0mm), Red Triple Digit 7-segment SMD LED Display

# **Technical Data Sheet**

# **Package Dimension**

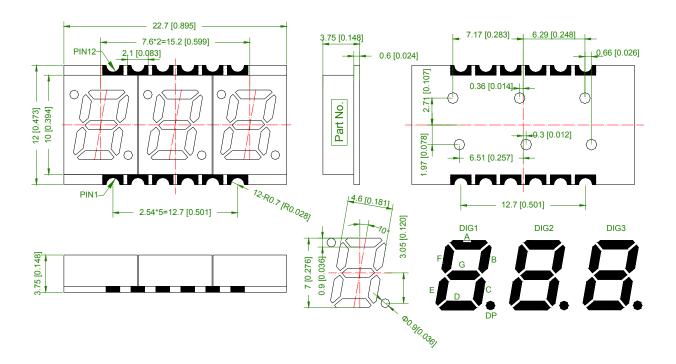

#### Notes:

- 1. All dimensions are in millimeters (inches).
- 2. Tolerance is  $\pm$  0.25 mm (.010") unless otherwise noted.
- 3. The gap between the reflector and PCB shall not exceed 0.25mm.

Spec No.: S282-Y024
Issue No.: G-001-Rev-3
Luckylight Electronics Co., Ltd
Copyright © 2017 Luckylight All Rights Reserved

Date: 16-Mar-2018

E-mail: sales@luckylight.cn

http:// www.luckylight.cn

Page: 2/8




0.28inch (7.0mm), Red Triple Digit 7-segment SMD LED Display

# **Technical Data Sheet**

# **Internal Circuit Diagram:**


# Internal Circuit Diagram (Common Anode)

### KW3-S282AVA

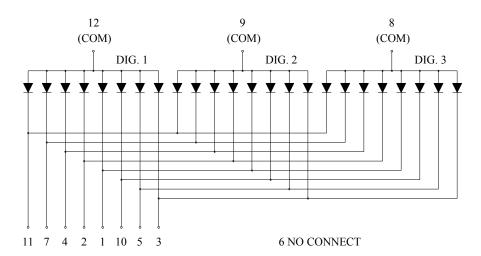

# Internal Circuit Diagram (Common Cathode)

## KW3-S282CVA

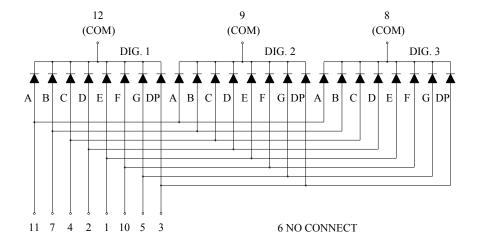

Spec No.: S282-Y024
Issue No.: G-001-Rev-3
Luckylight Electronics Co., Ltd
Copyright © 2017 Luckylight All Rights Reserved

Date: 16-Mar-2018

E-mail: sales@luckylight.cn

http:// www.luckylight.cn

Page: 3/8



0.28inch (7.0mm), Red Triple Digit 7-segment SMD LED Display

# **Technical Data Sheet**

# Absolute Maximum Ratings at Ta=25℃

Parameters	Symbol	Max	Unit	
Power Dissipation Per Segment	$P_d$	48	mW	
Peak Forward Current Per Segment (1/10 Duty Cycle, 0.1ms Pulse Width)	I <sub>FP</sub>	100	mA	
Forward Current Per Segment	l <sub>F</sub>	20	mA	
Reverse Voltage Per Segment	V <sub>R</sub>	5	V	
Operating Temperature Range	$T_{opr}$	-40°C to +100°C		
Storage Temperature Range	T <sub>stg</sub>	-40℃ to +105℃		
Soldering Temperature	$T_{sld}$	260°C for 5 Seconds		

# **Electrical Optical Characteristics at Ta=25℃**

Parameters	Symbol	Min.	Тур.	Max.	Unit	Test Condition
Average Luminous Intensity	lv	7.0	14.0		mcd	IF=10mA (Note a)
Luminous Intensity Matching Ratio	I <sub>v-m</sub>			2:1		IF=10mA
Peak Emission Wavelength	λр		632		nm	IF=20mA
Dominant Wavelength	λd		624		nm	IF=20mA (Note b)
Spectral Line Half-Width	$\triangle \lambda$		20		nm	IF=20mA
Forward Voltage Per Segment	VF		2.0	2.4	V	IF=20mA
Reverse Current Per Segment	I <sub>R</sub>			50	μA	VR=5V

#### Notes:

- a. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
- b. The dominant wavelength (λd) is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.

Spec No.: S282-Y024 Issue No.: G-001-Rev-3 Luckylight Electronics Co., Ltd

E-mail: sales@luckylight.cn http:// www.luckylight.cn

Date:

16-Mar-2018


Copyright © 2017 Luckylight All Rights Reserved Page: 4/8





0.28inch (7.0mm), Red Triple Digit 7-segment SMD LED Display


# **Technical Data Sheet**


# **Typical Electrical / Optical Characteristics Curves** (25°C Ambient Temperature Unless Otherwise Noted)











Spec No.: S282-Y024 Issue No.: G-001-Rev-3 Luckylight Electronics Co., Ltd Copyright © 2017 Luckylight All Rights Reserved

www.luckylight.cn http:// Page: 5/8


Date: 16-Mar-2018 E-mail: sales@luckylight.cn




0.28inch (7.0mm), Red
Triple Digit 7-segment SMD LED Display

# **Technical Data Sheet**


### The Products In The Reel Of Direction



### **Label Direction & Content In The Roll**

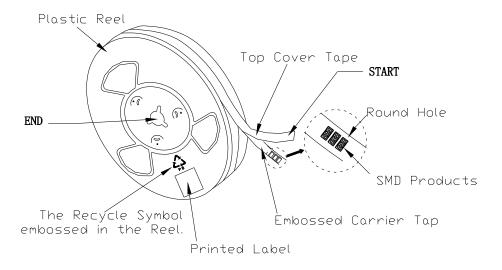

# **User Feed Direction**

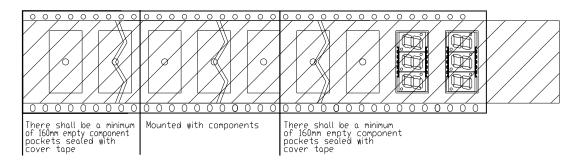

# **Package Criteria**

- 1. Total unit per reel is 1000PCS.
- 2. Max 5 reels/5000PCS are packaged in each carton.

Spec No.:S282-Y024Date:16-Mar-2018Issue No.:G-001-Rev-3E-mail:sales@luckylight.cnLuckylight Electronics Co., Ltdhttp://www.luckylight.cn

Copyright © 2017 Luckylight All Rights Reserved Page: 6 / 8



0.28inch (7.0mm), Red
Triple Digit 7-segment SMD LED Display

# **Technical Data Sheet**

# Terms and conditions for the usage of this document

- 1. The information included in this document reflects representative usage scenarios and is intended for technical reference only.
- 2. The part number, type, and specifications mentioned in this document are subject to future change and improvement without notice. Before production usage customer should refer to the latest datasheet for the updated specifications.
- 3. When using the products referenced in this document, please make sure the product is being operated within the environmental and electrical limits specified in the datasheet. If customer usage exceeds the specified limits, Luckylight will not be responsible for any subsequent issues.
- 4. The information in this document applies to typical usage in consumer electronics applications. If customer's application has special reliability requirements or have life-threatening liabilities, such as automotive or medical usage, please consult with Luckylight representative for further assistance.
- 5. The contents and information of this document may not be reproduced or re-transmitted without permission by Luckylight.
- 6. The LEDs should be operated with forward bias. The driving circuit must be designed so that the LEDs are not subjected to forward or reverse voltage while it is off. If reverse voltage is continuously applied to the LEDs, it may cause migration resulting in LED damage.

Spec No.: S282-Y024
Issue No.: G-001-Rev-3
Luckylight Electronics Co., Ltd

Copyright © 2017 Luckylight All Rights Reserved

Date: 16-Mar-2018 E-mail: sales@luckylight.cn

http:// www.luckylight.cn

Page: 7 / 8



0.28inch (7.0mm), Red Triple Digit 7-segment SMD LED Display


# **Technical Data Sheet**

## **Precautions for Use**

#### 1. Caution in ESD

Static electricity and surge damages the LED. It is recommended to use a wrist band or anti-electrostatic glove when handling the LED. All devices equipment and machinery must be properly grounded.


### 2. SMT Soldering Condition

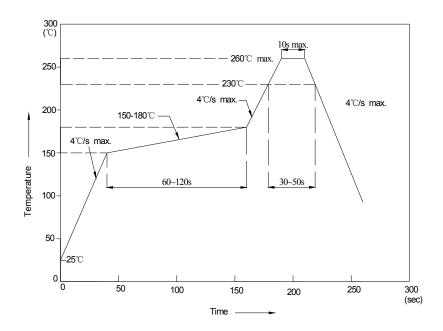

Reflow Soldering (Two times only)		Soldering Iron (One time only)		
Pre-heat	120~150℃	Temperature	300℃ Max.	
Pre-heat time	120 sec. Max.	Soldering time	3 sec. Max.	
Peak temperature	260°C Max.			
Soldering time	5 sec. Max.			

#### 3. Circuit Design Notes:

- 1. Protective current-limiting resistors may be necessary to operate the LEDs within the specified range.
- 2. LEDs mounted in parallel should each be placed in series with its own current-limiting resistor.

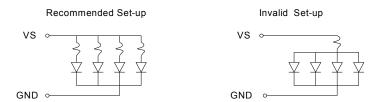

Spec No.: S282-Y024
Issue No.: G-001-Rev-3
Luckylight Electronics Co., Ltd
Copyright © 2017 Luckylight All Rights Reserved

Page: 8/8

Date:

E-mail:

http://

16-Mar-2018

sales@luckylight.cn

www.luckylight.cn