

0.39 inch (10.00mm), Yellow Green Quadruple Digit 7-segment SMD LED Display

Technical Data Sheet

Features

- 0.39 inch (10.00mm) digit height.
- The thickness is thinness than tradition display.
- Packaged in tape and reel for SMT manufacturing.
- Low current operation.
- Excellent characters appearance.
- Categorized for luminous intensity.
- Available in CA and CC.
- The product itself will remain within RoHS compliant Version.



Descriptions

- The KW4-S391AGA / KW4-S391CGA is a 0.39 inch (10.00mm) height quadruple digit display.
- The display provides excellent reliability in bright ambient light.
- The device is made with white segments and gray surface.

Applications

- Home appliances
- Game machine
- Instrument panels
- Digital readout displays

Device Selection Guide

| Part No. | Emitting Color | Polarity |
|-------------|-----------------------|----------------|
| KW4-S391AGA | Yellow Green | Common Anode |
| KW4-S391CGA | Yellow Green | Common Cathode |

Spec No.:S391-Y024Date:16-Mar-2018Issue No.:G-001-Rev-3E-mail:sales@luckylight.cnLuckylight Electronics Co., Ltdhttp://www.luckylight.cn


Copyright © 2017 Luckylight All Rights Reserved Page: 1 / 8





0.39 inch (10.00mm), Yellow Green Quadruple Digit 7-segment SMD LED Display


Technical Data Sheet

Package Dimension











Notes:

1. All dimensions are in millimeters (inches).

2. Tolerance is ± 0.25 mm (.010") unless otherwise noted.

3. The gap between the reflector and PCB shall not exceed 0.25mm.

Spec No.:S391-Y024Date:16-Mar-2018Issue No.:G-001-Rev-3E-mail:sales@luckylight.cnLuckylight Electronics Co., Ltdhttp://www.luckylight.cn

Copyright © 2017 Luckylight All Rights Reserved Page: 2 / 8




0.39 inch (10.00mm), Yellow Green Quadruple Digit 7-segment SMD LED Display

Technical Data Sheet

Internal Circuit Diagram:


Internal Circuit Diagram (Common Anode)

KW4-S391AGA

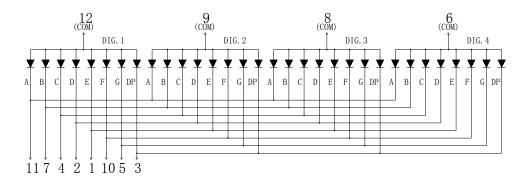

Internal Circuit Diagram (Common Cathode)

KW4-S391CGA

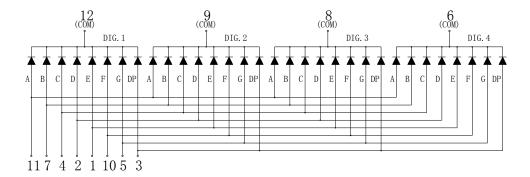

Spec No.:S391-Y024Date:16-Mar-2018Issue No.:G-001-Rev-3E-mail:sales@luckylight.cnLuckylight Electronics Co., Ltdhttp://www.luckylight.cn

Copyright © 2017 Luckylight All Rights Reserved Page: 3 / 8



0.39 inch (10.00mm), Yellow Green Quadruple Digit 7-segment SMD LED Display

Technical Data Sheet

Absolute Maximum Ratings at Ta=25℃

| Parameters | Symbol | Max | Unit | |
|---|------------------|---------------------|------|--|
| Power Dissipation Per Segment | P_d | 48 | mW | |
| Peak Forward Current Per Segment (1/10 Duty Cycle, 0.1ms Pulse Width) | I _{FP} | 100 | mA | |
| Forward Current Per Segment | l _F | 20 | mA | |
| Reverse Voltage Per Segment | V _R | 5 | V | |
| Operating Temperature Range | Торг | -40°C to +1 | 100℃ | |
| Storage Temperature Range | T _{stg} | -40℃ to +1 | 105℃ | |
| Soldering Temperature | T_{sld} | 260°C for 5 Seconds | | |

Electrical Optical Characteristics at Ta=25℃

| Parameters | Symbol | Min. | Тур. | Max. | Unit | Test Condition |
|-----------------------------------|---------------------|------|------|------|------|------------------|
| Average Luminous Intensity | lv | 4.5 | 8.5 | | mcd | IF=10mA (Note a) |
| Luminous Intensity Matching Ratio | I _{v-m} | | | 2:1 | | IF=10mA |
| Peak Emission Wavelength | λр | | 575 | | nm | IF=20mA |
| Dominant Wavelength | λd | | 572 | | nm | IF=20mA (Note b) |
| Spectral Line Half-Width | $\triangle \lambda$ | | 20 | | nm | IF=20mA |
| Forward Voltage Per Segment | VF | | 2.0 | 2.4 | V | IF=20mA |
| Reverse Current Per Segment | I _R | | | 50 | μA | VR=5V |

Notes:

- a. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
- b. The dominant wavelength (λd) is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.

Spec No.: S391-Y024
Issue No.: G-001-Rev-3
Luckylight Electronics Co., Ltd
Copyright © 2017 Luckylight All Rights Reserved

Date: 16-Mar-2018
E-mail: sales@luckylight.cn
http:// www.luckylight.cn


Page: 4/8





0.39 inch (10.00mm), Yellow Green Quadruple Digit 7-segment SMD LED Display


Technical Data Sheet

Typical Electrical / Optical Characteristics Curves (25°C Ambient Temperature Unless Otherwise Noted)











Lum inous Intensity & Forward Current



Forward Current Derating Curve



Spec No.: S391-Y024 Issue No.: G-001-Rev-3 Luckylight Electronics Co., Ltd Copyright © 2017 Luckylight All Rights Reserved

Page: 5/8


Date: 16-Mar-2018 E-mail: sales@luckylight.cn http:// www.luckylight.cn




0.39 inch (10.00mm), Yellow Green Quadruple Digit 7-segment SMD LED Display

Technical Data Sheet


The Products In The Reel Of Direction



Label Direction & Content In The Roll

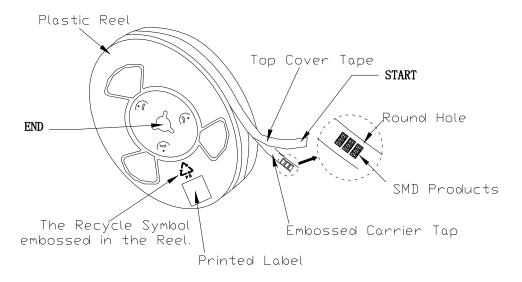

User Feed Direction

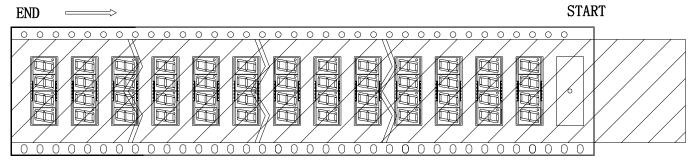

Package Criteria

- 1. Total unit per reel is 500PCS.
- 2. Max 5 reels/1500PCS are packaged in each carton.

Spec No.:S391-Y024Date:16-Mar-2018Issue No.:G-001-Rev-3E-mail:sales@luckylight.cnLuckylight Electronics Co., Ltdhttp://www.luckylight.cn

Copyright © 2017 Luckylight All Rights Reserved Page: 6 / 8



0.39 inch (10.00mm), Yellow Green Quadruple Digit 7-segment SMD LED Display

Technical Data Sheet

Terms and conditions for the usage of this document

- 1. The information included in this document reflects representative usage scenarios and is intended for technical reference only.
- 2. The part number, type, and specifications mentioned in this document are subject to future change and improvement without notice. Before production usage customer should refer to the latest datasheet for the updated specifications.
- 3. When using the products referenced in this document, please make sure the product is being operated within the environmental and electrical limits specified in the datasheet. If customer usage exceeds the specified limits, Luckylight will not be responsible for any subsequent issues.
- 4. The information in this document applies to typical usage in consumer electronics applications. If customer's application has special reliability requirements or have life-threatening liabilities, such as automotive or medical usage, please consult with Luckylight representative for further assistance.
- 5. The contents and information of this document may not be reproduced or re-transmitted without permission by Luckylight.
- 6. The LEDs should be operated with forward bias. The driving circuit must be designed so that the LEDs are not subjected to forward or reverse voltage while it is off. If reverse voltage is continuously applied to the LEDs, it may cause migration resulting in LED damage.

Spec No.: S391-Y024
Issue No.: G-001-Rev-3
Luckylight Electronics Co., Ltd

Copyright © 2017 Luckylight All Rights Reserved

Date: 16-Mar-2018
E-mail: sales@luckylight.cn
http:// www.luckylight.cn

Page: 7/8



0.39 inch (10.00mm), Yellow Green Quadruple Digit 7-segment SMD LED Display


Technical Data Sheet

Precautions for Use

1. Caution in ESD

Static electricity and surge damages the LED. It is recommended to use a wrist band or anti-electrostatic glove when handling the LED. All devices equipment and machinery must be properly grounded.


2. SMT Soldering Condition

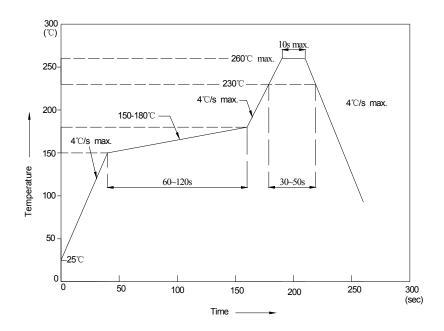

| Reflow Soldering (Two times only) | | Soldering | Soldering Iron (One time only) | | |
|-----------------------------------|---------------|----------------|--------------------------------|--|--|
| Pre-heat | 120~150℃ | Temperature | 300℃ Max. | | |
| Pre-heat time | 120 sec. Max. | Soldering time | 3 sec. Max. | | |
| Peak temperature | 260°C Max. | | | | |
| Soldering time | 5 sec. Max. | | | | |

3. Circuit Design Notes:

- 1. Protective current-limiting resistors may be necessary to operate the LEDs within the specified range.
- 2. LEDs mounted in parallel should each be placed in series with its own current-limiting resistor.



Spec No.: S391-Y024
Issue No.: G-001-Rev-3
Luckylight Electronics Co., Ltd
Copyright © 2017 Luckylight All Rights Reserved

Page: 8/8

Date:

E-mail:

http://

16-Mar-2018

sales@luckylight.cn

www.luckylight.cn